


Description	2-way proportional flow valve controls the volume flow of maximum 1185 l/min for air in proportion to the input signal of 0 to 10 V or 0/4 to 20 mA. The proportional valve and the electronic control unit are ordered separately.
Product selection	To achieve the best linear flow characteristics, it is advisable not to reduce the flow too much and to have enough pressure drop at the valve for good control. Reference value: at the valve > 30% of the total pressure drop.
Installation hint	The nominal width of the orifice following the proportional valve should not be smaller than the nominal width of the valve. A constriction of the cross-section after the valve should be categorically avoided!




**G $\frac{1}{8}$ up to G1
compressed air or liquids**

General technical features

Design	2-way proportional flow valve, normally closed during absence of current, with additional control module in cable plug or in housing for DIN rail mounting.		
Mounting position	any, preferably upright		
Protection class	IP 65 with coupling socket, IP 40 for DIN rail version		
Temperature range	-10 °C to 90 °C / 14 °F to 194 °F for media -10 °C to 55 °C / 14 °F to 131 °F for electronics		
Material	Body: brass Elastomer: FKM	Inner valve: brass and stainless steel Control housing: plastic	

Pneumatic features

Media	compressed air, non-corrosive gases or liquids, max. viscosity 21 mm ² /s, PV40 for liquids only
Operating pressure	see chart, max. 16 bar
Flow rate	0...2 / 1185 l/min for air, 0...0.03 / 83 l/min for liquids in detail see chart, at max. supply pressure and $\Delta p = 1$ bar

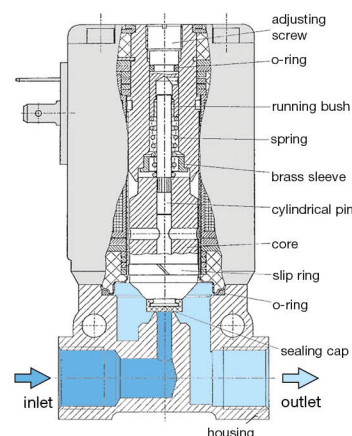

cross section

Electrical features


Supply voltage	24 V DC $\pm$ 10%, residual ripple max. 5%, with reverse voltage protection							
Power consumption	electronic 1 W	PV21 2 W to DN 0.6	PV21 5 W from DN 0.8 on	PV22 9 W	PV34 16 W	PV40-04 8 W	PV40-06 10 W	PV40-08 15 W
Command signal	0-5 V, 0-10 V, 0-20 mA or 4-20 mA selectable							
Impedance	> 20 k Ω at voltage signal < 200 Ω at current signal							
Electrical connector	PV21: square connector according to DIN 43650 form B PV22 ... PV40: square connector according to DIN 43650 form A							

Accuracy

Linearity	< 10 % FS		
Hysteresis	< 5 % FS		
Response sensitivity	< 0.1% FS at DN < 0,8 mm,	< 0.25% FS at DN $\geq$ 0,8 mm,	< 1% FS at PV40
Repeatability	< 0.25% FS	at PV22 < 0.5% FS	
Regulating time	PV21: < 15 ms, each for 90% of the range	PV22: < 20 ms,	PV34: < 50 ms, PV40: < 200 ms


Adjustment

Zero point	The zero point can be decreased or increased.
Range	The range can be decreased or increased.
Ramp	The ramping potentiometer adjusts the time delay with a range of 0 to 10 s in order to dampen sudden changes of the setpoint. Increasing and decreasing ramps have the same delay.
Zero point switch	Using a DIP switch, the zero point switch can be activated or deactivated. It is not necessary to have another switch-off valve.

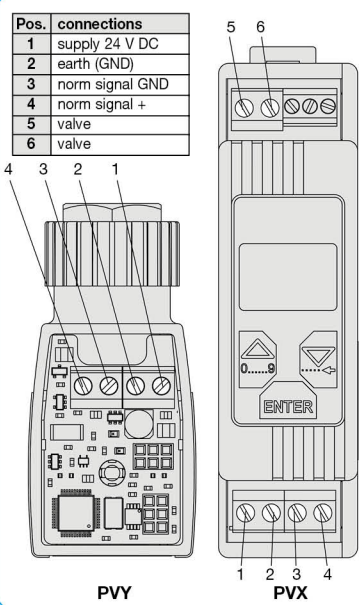

control electronics

Technical features	
• Media	compressed air, non-corrosive gases or liquids, except for PV40
• Signal range	0-5 V, 0-10 V, 0-20 mA, 4-20 mA
• Pressure range	vacuum ... 2 / 16 bar
• Orifice	DN 0.1 ... DN 20
• Flow rate	max. 1185 l/min for air, max. 90 l/min for water
• Adjustment	zero point, range and ramp
• Zero switch-off	ensures reliable closure of the valve
• Linearity	< 10% FS
• Hysteresis	< 5% FS
• Response sensitivity	< 0.1% FS at DN < 0.8 mm < 0.25% FS at DN ≥ 0.8 mm < 1% FS at PV40 < 0.25% FS, < 0.5% FS at PV22
• Repeatability	
• Regulating time	depending on type: < 15 ms, < 20 ms, < 50 ms or < 200 ms
• Protection class	IP65 with plug
• Impedance	> 20 kΩ at V _i , < 200 Ω at mA



G¹/₈ up to G1
compressed air or liquids

Dimensions	Nominal K _v -	Flow rate	Operating	Differ.-Connection	Order
A B C	size	value	pressure	press. thread	number
mm mm mm	DN (m³/h)	water air	max. bar	max. bar G	
		l/min*1 l/min*2			


Proportional flow valve									without electronics, brass, FKM, for compressed air, vacuum or liquids*2			PV
25	50	7	0.1	0.00025	0...	0.004	0...	0.27	10	10	G ¹ / ₈	PV21-01
25	50	7	0.2	0.001	0...	0.017	0...	1.0	10	10	G ¹ / ₈	PV21-02
25	50	7	0.3	0.002	0...	0.033	0...	2.2	10	10	G ¹ / ₈	PV21-03
25	50	7	0.4	0.004	0...	0.067	0...	4.0	8	8	G ¹ / ₈	PV21-04
25	50	7	0.6	0.010	0...	0.167	0...	11	6	6	G ¹ / ₈	PV21-06
25	50	7	0.8	0.018	0...	0.3	0...	19	12	6	G ¹ / ₈	PV21-08
25	50	7	0.8	0.018	0...	0.3	0...	19	12	12	G ¹ / ₈	PV21-08B
25	50	7	1.0	0.027	0...	0.3	0...	19	10	5	G ¹ / ₈	PV21-10
25	50	7	1.0	0.027	0...	0.3	0...	19	10	10	G ¹ / ₈	PV21-10B
25	50	7	1.2	0.038	0...	0.633	0...	41	8	4	G ¹ / ₈	PV21-12
25	50	7	1.2	0.038	0...	0.633	0...	41	8	8	G ¹ / ₈	PV21-12B
25	50	7	1.6	0.055	0...	0.917	0...	59	6	3	G ¹ / ₈	PV21-16
25	50	7	1.6	0.055	0...	0.917	0...	59	6	6	G ¹ / ₈	PV21-16B
25	50	7	2.0	0.090	0...	1.5	0...	97	3	1.5	G ¹ / ₈	PV21-20
25	50	7	2.0	0.090	0...	1.5	0...	97	3	3	G ¹ / ₈	PV21-20B
32	66	8.5	0.8	0.018	0...	0.3	0...	19	16	8	G ¹ / ₈	PV22-08
32	66	8.5	0.8	0.018	0...	0.3	0...	19	16	16	G ¹ / ₈	PV22-08B
32	66	8.5	1.0	0.027	0...	1.0	0...	65	14	7	G ¹ / ₈	PV22-10
32	66	8.5	1.0	0.027	0...	1.0	0...	65	14	14	G ¹ / ₈	PV22-10B
32	66	8.5	1.2	0.040	0...	0.67	0...	43	12	6	G ¹ / ₈	PV22-12
32	66	8.5	1.2	0.040	0...	0.67	0...	43	12	12	G ¹ / ₈	PV22-12B
32	66	8.5	1.5	0.060	0...	1.0	0...	65	10	5	G ¹ / ₈	PV22-15
32	66	8.5	1.5	0.060	0...	1.0	0...	65	10	10	G ¹ / ₈	PV22-15B
46	72	8.5	2.0	0.10	0...	1.66	0...	108	8	4	G ¹ / ₄	PV22-20
46	72	8.5	2.0	0.10	0...	1.66	0...	108	8	8	G ¹ / ₄	PV22-20B
46	72	8.5	2.5	0.15	0...	2.5	0...	162	5	2.5	G ¹ / ₄	PV22-25
46	72	8.5	2.5	0.15	0...	2.5	0...	162	5	5	G ¹ / ₄	PV22-25B
46	72	8.5	3.0	0.22	0...	3.67	0...	237	3.5	1.8	G ¹ / ₄	PV22-30
46	72	8.5	3.0	0.22	0...	3.67	0...	237	3.5	3.5	G ¹ / ₄	PV22-30B
46	72	8.5	4.0	0.32	0...	5.33	0...	345	2	1	G ¹ / ₄	PV22-40
46	72	8.5	4.0	0.32	0...	5.33	0...	345	2	2	G ¹ / ₄	PV22-40B




PV21



PV22



PV21



PV22

*1 at max. operating pressure and Δp = 1 bar *2 at pressure drop from 6 bar down to 5 bar


Technische Daten: siehe vorherige Seite

PDF CAD
www.aircom.net



Order example:
PV21-01

- Media - Signal range - Pressure range - Orifice - Flow rate - Adjustment - Zero switch-off	Technical features compressed air, non-corrosive gases or liquids, except for PV40		Linearity		< 10%	FS
	0-5 V, 0-10 V, 0-20 mA, 4-20 mA		Hysteresis		< 5%	FS
	vacuum...2 / 16 bar		Response sensitivity		< 0.1%	FS at DN < 0.8 mm
	DN 0.1 ... DN 20		Repeatability		< 0.25%	FS at DN ≥ 0.8 mm
	max. 1185 l/min for air, max. 90 l/min for water		Regulating time		< 1%	FS at PV40
	zero point, range and ramp		Protection class		< 0.25%	FS, < 0.5% FS at PV22
ensures reliable closure of the valve		Impedance		depending on type: < 15 ms, < 20 ms, < 50 ms or < 200 ms		
				IP65 with plug		
				> 20 kΩ at V, < 200 Ω at mA		



G¹/₈ up to G1
compressed air or liquids

Dimensions			Nominal K _v -		Flow rate		Operating	Differ.-	Connection	Order
A	B	C	size	value	water	air	pressure	press.	thread	number
mm	mm	mm	DN	(m³/h)	l/min*1	l/min*2	max. bar	max. bar	G	

Proportional flow valve										without electronics, brass, FKM, for compressed air, vacuum or liquids*2	PV
55	105	11	4.0	0.45	0... 7.5	0... 485	8	4	G ³ / ₈		PV34-40
55	105	11	4.0	0.45	0... 7.5	0... 485	8	8	G ³ / ₈		PV34-40B
55	105	11	6.0	0.80	0... 13.3	0... 860	4	2	G ¹ / ₂		PV34-60
55	105	11	6.0	0.80	0... 13.3	0... 860	4	4	G ¹ / ₂		PV34-60B
55	105	11	8.0	1.10	0... 18.3	0... 1185	2	1	G ¹ / ₂		PV34-80
55	105	11	8.0	1.10	0... 18.3	0... 1185	2	2	G ¹ / ₂		PV34-80B
50	89	12	10	1.4	0... 25.0*3	-	10		G ¹ / ₂		PV40-04
58	110	14	13	2.5	0... 45.0*3	-	10		G ³ / ₄		PV40-06
80	155	16	20	5.0	0... 90.0*3	-	10		G1		PV40-08



PV34



PV40

Special options, add the appropriate letter

stainless steel body SST 316, W.-No. 1.4401 for PV21 to PV34 PV...S


Accessories, enclosed

plug electronics	24 V DC, 0-5 V, 0-10 V, 0/4 mA-20 mA	for PV22 to PV40	PVY-06
clip-on electronics	24 V DC, 0-5 V, 0-10 V, 0/4 mA-20 mA	for PV21	PVX-01
		for PV22 to PV40	PVX-02
coupling socket	according to DIN 43650 form B	for PV21	2285-0
	according to DIN 43650 form A	for PV22 to PV40	2286-0



PVY

PVX

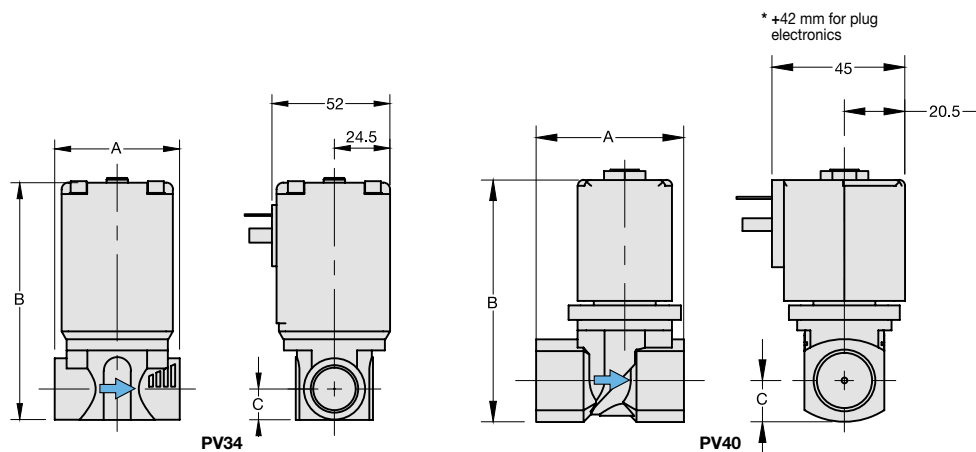

PV34

PV40

*1 at max. operating pressure and Δp = 1 bar *2 at pressure drop from 6 bar down to 5 bar
*3 PV40 is not suitable for compressed air and vacuum, since pilot-controlled

Technical informations: see previous page

PDF CAD
www.aircom.net



Order example:
PV34-40