

Description	The proportional flow valve can be controlled either by 24 V DC or optionally by a plug amplifier with switchable signals.		
Media	50 µm filtered compressed air, vacuum, non-corrosive gases or liquids		
Plug amplifier	Conversion of the analogue signal into a pulse-wide modulated current.		
Electrical connector	Supply voltage: 24 V DC, max. 1.1 A	Adjustment:	zero point and range
Protection class	Switchable signal: 0...10 V, 0...20 mA, 4...20 mA	Time ramp:	0.1 to 3 s selectable
Temperature range	Close function: < 2% of max. signal	Hum frequency:	40 to 700 Hz selectable
	Plug, 3-pin, with coupling socket (Pg 9P or PG 11P)	Operating pressure	see chart, max. 12 bar
	IP 65 with coupling socket	Mounting position	any
	-10 °C to 90 °C / 14 °F to 194 °F		
Viscosity max.			
Power consumption			
Hysteresis / Sensitivity			
Repeatability			
Body / Inner valve			

Dimensions	Media	Nominal	K _v -	Flow	Supply	Connection	Order
A B C	A: air	size	value	rate	max.	thread	number
mm mm mm	W: water	DN	(m³/h)	l/min*1	bar	G	

Proportional flow valve 24 V DC, direct control, without amplifier, with coupling socket, made of brass PV202 / PV203





25	78	8	A	1.2	0.05	0... 70	8.0	G $\frac{1}{8}$	PV202-1-12
				1.6	0.07	0...110	6.0		PV202-1-16
				2.4	0.13	0... 70	4.0		PV202-1-24
				3.2	0.18	0...105	2.5		PV202-1-32
40	95	20	A/W*3	1.2	0.05	0... 60	16	G $\frac{1}{4}$	PV202-2-12
				2.4	0.12	0...110	8.0		PV202-2-24
				3.2	0.24	0...170	4.0		PV202-2-32
				4.0	0.42	0...280	2.5		PV202-2-40
				5.6	0.72	0...310	1.4		PV202-2-56
				7.1	0.90	0...390	1.0		PV202-2-71
48	97	14	A/W*3	3.2	0.24	0...190	4.0	G $\frac{3}{8}$	PV202-3-32
				4.0	0.42	0...300	2.5		PV202-3-40
				5.6	0.72	0...330	1.4		PV202-3-56
				7.1	0.90	0...420	1.0		PV202-3-71
52	105	14	W	12.5	2.10	0... 35*2	10	G $\frac{3}{8}$	PV203-3-125W
				12.5	2.10	0... 37*2	10	G $\frac{1}{2}$	PV203-4-125W

Special options, add the appropriate letter

for water or oil		for PV202, G $\frac{1}{4}$ and G $\frac{3}{8}$	PV202-...W
stainless steel body	NPT connection thread, FKM elastomere	for PV202	PV202-...S
12 V DC	voltage signal		PV20-...12V

Accessories, enclosed

plug amplifier	24 V DC, switchable 0-10 V, 0-20 mA, 4-20 mA	for PV202, G $\frac{1}{8}$	PVY-03
		for all others	PVY-04
plug amplifier	12 V DC, switchable 0-10 V, 0-20 mA, 4-20 mA	für PV202, G $\frac{1}{8}$	PVY-08
		for all others	PVY-09

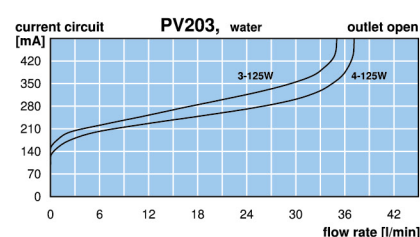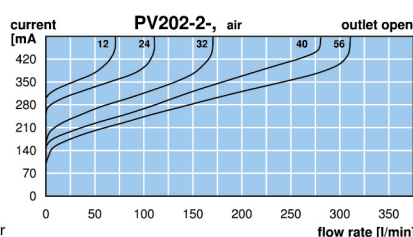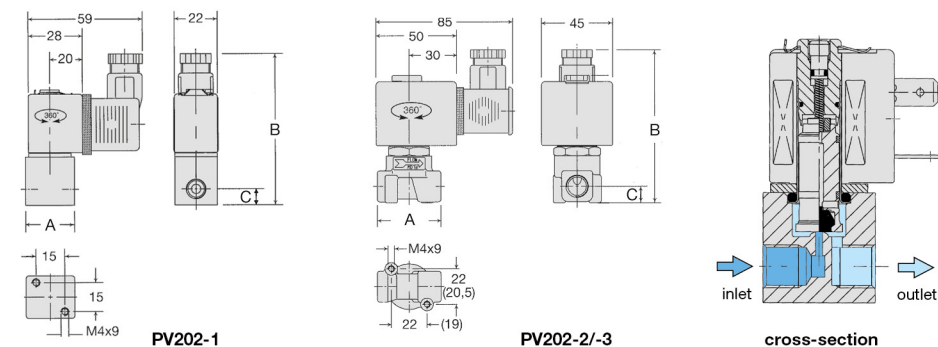

*1 for compressed air at operating pressure 6 bar and $\Delta p = 1$ bar
 *2 flow rate for water since valve is pilot-controlled
 *3 for liquids add W to order number of type PV202-2/-3

* Product group

PDF CAD
 www.aircom.net



Order example:
 PV202-1-12