


| | |
|---------------------------|---|
| Description | Compressed air lubricator of solid design and small size. Proven in operation and suitable for many applications. Available in all standard sizes and in many versions. |
| Bowl | plastic version with bowl guard metal version with or without sight glass |
| Operating pressure | max. 11 bar for plastic bowl max. 17 bar for metal bowl with sight glass max. 21 bar for metal bowl without sight glass |
| Temperature range | 0 °C to 50 °C / 32 °F to 122 °F for plastic bowl 0 °C to 70 °C / 32 °F to 158 °F for metal bowl with sight glass, from G ³ / ₄ on 0 °C to 80 °C / 32 °F to 176 °F for metal bowl with/without sight glass for appropriately conditioned compressed air down to -30 °C / -22 °F |
| Material | Body: zinc die-cast Bowl: polyurethane, zinc die-cast or steel Elastomer: NBR/Buna-N |



| Dimensions | | | Bowl | Flow | Operating | Connection | Order |
|------------|----|----|---------------|-----------------------|-----------|------------|--------|
| A | B | C | design | rate | pressure | thread | number |
| mm | mm | mm | made of/ with | l m ³ /h*1 | l/min*1 | max. bar | G |

| „Standard“ lubricator | | | | | | | | | | L606 |
|-----------------------|-----|-----|--------------------|------|-----|------|----|-------------------------------|----------|------|
| 71 | 202 | 145 | plastic/bowl guard | 0.08 | 66 | 1100 | 11 | G ¹ / ₄ | L606-02B | |
| 71 | 202 | 145 | metal/sight glass | 0.08 | | | 17 | | L606-02W | |
| 71 | 202 | 145 | plastic/bowl guard | 0.08 | 108 | 1800 | 11 | G ³ / ₈ | L606-03B | |
| 71 | 202 | 145 | metal/sight glass | 0.08 | | | 17 | | L606-03W | |
| 71 | 202 | 145 | plastic/bowl guard | 0.08 | 151 | 2500 | 11 | G ¹ / ₂ | L606-04B | |
| 71 | 202 | 145 | metal/sight glass | 0.08 | | | 17 | | L606-04W | |
| 103 | 251 | 184 | metal/sight glass | 0.50 | 492 | 8200 | 17 | G ³ / ₄ | L606-06W | |
| 103 | 340 | 273 | steel | 1.00 | | | 21 | | L606-06E | |
| 103 | 340 | 273 | steel/sight glass | 1.00 | | | 17 | | L606-06F | |
| 103 | 306 | 239 | steel/sight glass | 2.00 | | | 17 | | L606-06G | |
| 103 | 251 | 184 | metal/sight glass | 0.50 | 540 | 9000 | 17 | G1 | L606-08W | |
| 103 | 340 | 273 | steel | 1.00 | | | 21 | | L606-08E | |
| 103 | 340 | 273 | steel/sight glass | 1.00 | | | 17 | | L606-08F | |
| 103 | 306 | 239 | steel/sight glass | 2.00 | | | 17 | | L606-08G | |

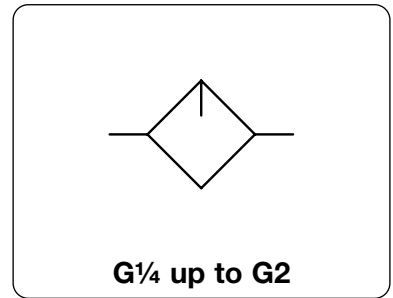

L606-02W

L606-08W



L606-08E
1 I-bowl

L606-08G
2 I-bowl


Special options, add the appropriate letter

| | | |
|--------------------------|---|--------------|
| NPT | connection thread | L606- ... N |
| flange connection | see chapter for stainless steel devices / flanges | L606- ... F. |


Lubricator



18

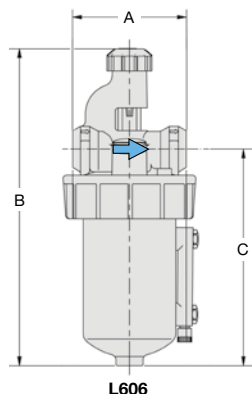

L606

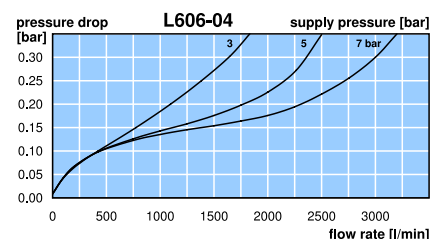

*1 at 7 bar operating pressure and 0.33 bar pressure drop


Extensions: see chapter for FRL service units
Spare parts: see separate spare parts list

PDF CAD
www.aircom.net



Order example:
L606-02B

| | |
|---------------------------|---|
| Description | Compressed air lubricator of solid design and small size. Proven in operation and suitable for many applications. Available in all standard sizes and in many versions. |
| Bowl | plastic version with bowl guard metal version with or without sight glass |
| Operating pressure | max. 11 bar for plastic bowl max. 17 bar for metal bowl with sight glass max. 21 bar for metal bowl without sight glass |
| Temperature range | 0 °C to 50 °C / 32 °F to 122 °F for plastic bowl 0 °C to 70 °C / 32 °F to 158 °F for metal bowl with sight glass, from G $\frac{3}{4}$ on 0 °C to 80 °C / 32 °F to 176 °F for metal bowl with/without sight glass for appropriately conditioned compressed air down to -30 °C / -22 °F |
| Material | Body: zinc die-cast Bowl: polyurethane, zinc die-cast or steel Elastomer: NBR/Buna-N |

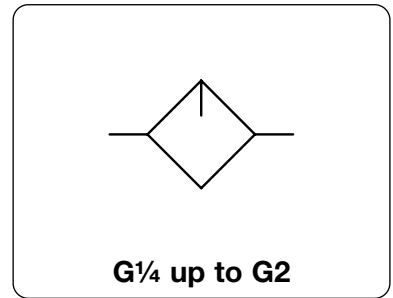



| Dimensions | | | Bowl | Flow | Operating | Connection | Order |
|------------|----|----|---------------|-----------------------|-----------|------------|--------|
| A | B | C | design | rate | pressure | thread | number |
| mm | mm | mm | made of/ with | l m ³ /h*1 | l/min*1 | max. bar | G |

| „Standard“ lubricator | | | | | | | | L606 | |
|-----------------------|-----|-----|-------------------|------|------|-------|----|---------------------|------------|
| 122 | 266 | 194 | metal/sight glass | 0.50 | 1020 | 17000 | 17 | G1 $\frac{1}{4}$ *2 | L606-10W |
| 122 | 355 | 283 | steel | 1.00 | | | 21 | | L606-10E |
| 122 | 355 | 283 | steel/sight glass | 1.00 | | | 17 | | L606-10F |
| 122 | 300 | 228 | steel/sight glass | 2.00 | | | 17 | | L606-10G |
| 122 | 266 | 194 | metal/sight glass | 0.50 | 1020 | 17000 | 17 | G1 $\frac{1}{2}$ | L606-12W |
| 122 | 355 | 283 | steel | 1.00 | | | 21 | | L606-12E |
| 122 | 355 | 283 | steel/sight glass | 1.00 | | | 17 | | L606-12F |
| 122 | 300 | 228 | steel/sight glass | 2.00 | | | 17 | | L606-12G |
| 133 | 385 | 265 | steel/sight glass | 1.00 | 1680 | 28000 | 17 | G2 | L606-16F |
| 134 | 490 | 370 | steel/sight glass | 3.00 | | | 17 | | L606-16K3L |



Special options, add the appropriate letter

| | | |
|--------------------------|---|-------------|
| NPT | connection thread | L606-... N |
| flange connection | see chapter for stainless steel devices / flanges | L606-... F. |

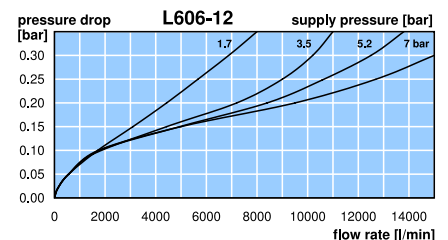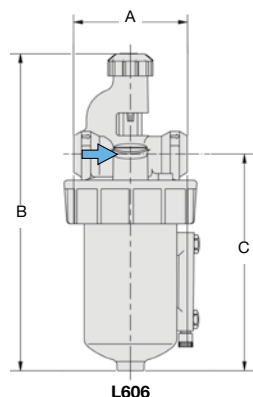

*1 at 7 bar operating pressure and 0.33 bar pressure drop
*2 reduced by the next larger oiler

Extensions: see chapter for FRL service units
Spare parts: see separate spare parts list

PDF CAD
www.aircom.net



Order example:
L606-10W

