


FRL SERVICE UNITS

DESCRIPTION		PRESSURE RANGE max. bar	CONNECTION thread	DEVICE	PAGE
made of plastic, 2- and 3-part	C2, C3	0 ... 8 / 12	G $\frac{1}{4}$ - G1	C2, C3	19.03
assembly diagrams	C2, C3			C2, C3	19.04
switch-on and soft start valve	C2, C3		G $\frac{1}{4}$ - G $\frac{3}{4}$	A0, S0, V0	19.05
„Midi“-Series made of metal, 2- and 3-part		0.2 ... 4 / 17	G $\frac{1}{4}$ - G $\frac{1}{2}$	C10, C11	19.06
„Maxi“-Series, made of metal, robust, 2- and 3-part		0.2 ... 4 / 17	G $\frac{1}{4}$ - G1	C20, C21	19.07
Series „D“, made of alu/zinc die-cast, 2-part		0.3 ... 3 / 15	G $\frac{1}{8}$ - G2	CD2	19.08
Series „D“, made of alu/zinc die-cast, 3-part		0.3 ... 3 / 15	G $\frac{1}{8}$ - G2	CD3	19.09
„Standard“-Series, robust		0.2 ... 4 / 17	G $\frac{3}{4}$ - G2	C630	19.10
drain valves		max. 21		SA, RK	19.11
hose rupture valves, aluminium/stainless steel		max. 18	G $\frac{1}{4}$ - G2	281	19.12



19


ASSEMBLY DIAGRAMS FOR PLASTIC FRL SERVICE UNITS C2/C3

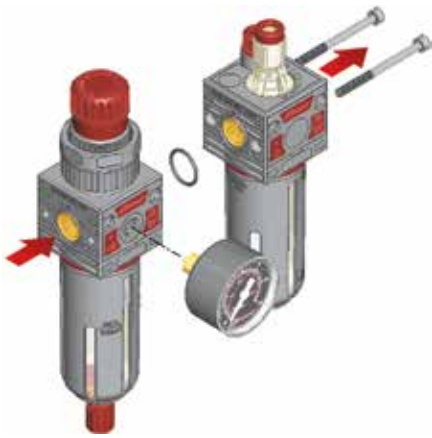

screw connection of standard FRL service unit with screws, nuts and o-ring C400500001


Series 042

compressed air lubricator
soft start valve
electric switch-on valve
filter regulator
"T" mounting bracket C420500001

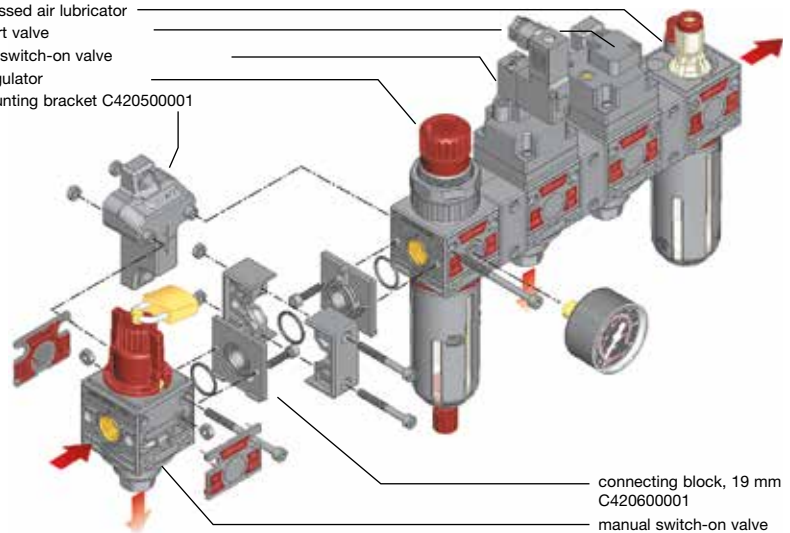

connecting block, 19 mm C420600001
manual switch-on valve


compressed air lubricator
soft start valve
electrical switch-on valve
branch plate C750600002
mounting bracket BW42-01

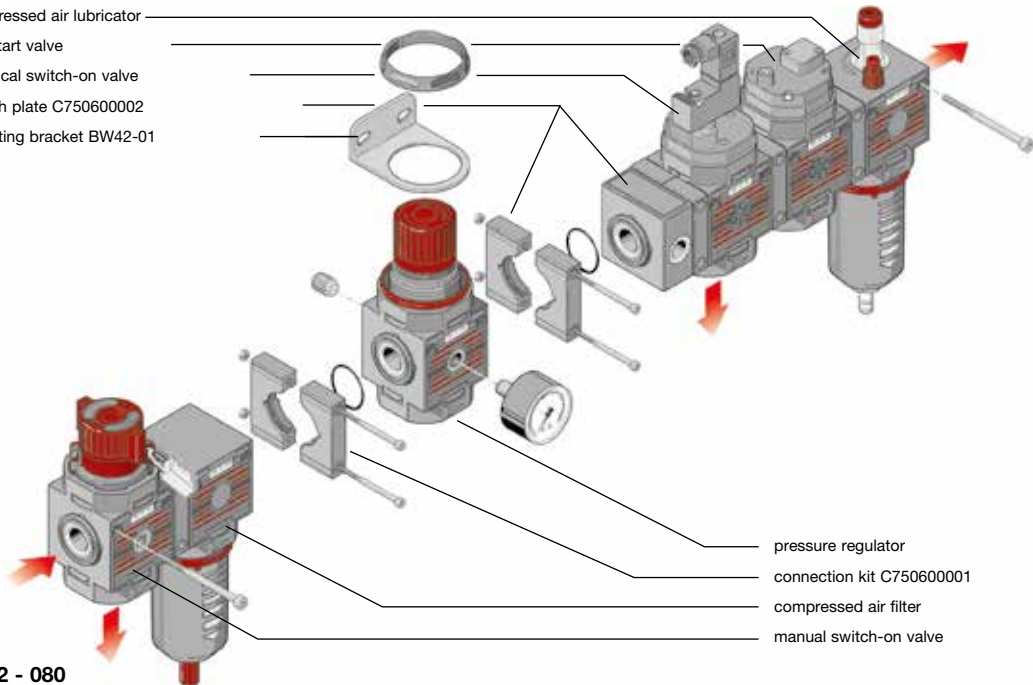

pressure regulator
connection kit C750600001
compressed air filter
manual switch-on valve

Series 075


similar to Series 050 - 052 - 080

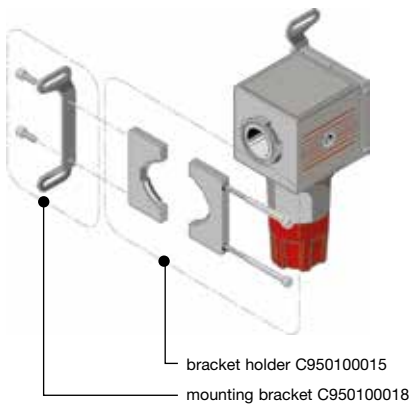

bracket holder C950100015
mounting bracket C950100018


Series 095

mounting bracket C950100018

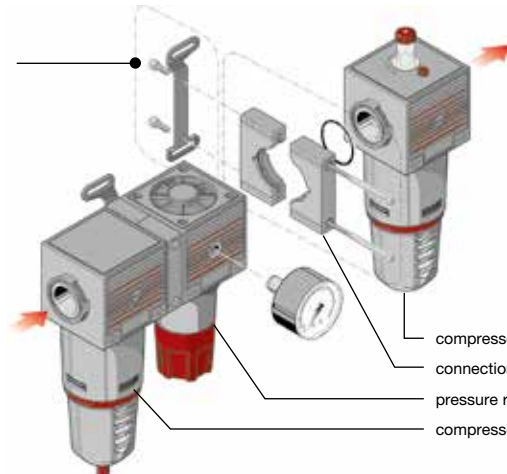

compressed air lubricator
connection kit C950600001
pressure regulator
compressed air filter

Description	Made up of modular components which can be combined to form compact units. Switch-on and soft start valves available as additional modules.		
Media	compressed air or non-corrosive gases		
Supply pressure	max. 12.5 bar, max. 7 bar at lubricator with oil level indicator, max. 16 bar for Series 042		
Gauge port	G $\frac{1}{8}$ or G $\frac{1}{4}$ at series 095, on both sides of the body, one screw plug supplied		
Filter element	20 μ m, optionally 5 μ m, made of sintered polyethylene		
Bowl	plastic version with bayonet catch, series 042 with connection thread		
Drain	manual drain with semiautomatic drain, optionally automatic drain		
Oil refilling	optionally with semiautomatic oil refilling without need to interrupt operation		
Oil level indicator	If the oil level falls below the limit value, a float will close a signal contact.		
Temperature range	0 °C to 50 °C / 32 °F to 122 °F	Contact: NO	Voltage: max. 115 V
Material	Body: nylon, POM at series 042	Inner valve: brass	Thread insert: brass
	Bowl: polyamide		
	Elastomer: NBR/Buna-N		

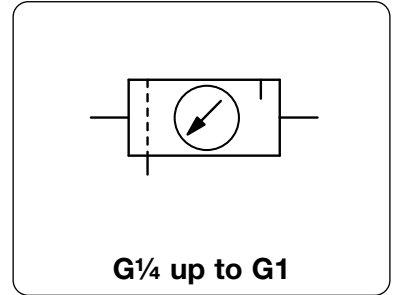

Dimensions				Combination	Bowl	Flow	Connection	Order
A	B	C	K	consist	design	rate	thread	number
mm	mm	mm	mm	of	made of / with	m ³ /h*1	l/min*1	G

FRL unit, 2-part					P ₁ : max. 12.5 / 16 bar, P ₂ : 0...8 bar, 20 μ m, semiautomatic drain, with pressure gauge		C2		
84	208	126	-	B+L042	plastic/	59	980	G $\frac{1}{4}$	C242-02HC
115	239	148	126	B+L050	bowl guard	84	1400	G $\frac{3}{8}$	C250-03HC
115	239	148	126	B+L052		90	1500	G $\frac{1}{2}$	C252-04HC
139	276	173	151	B+L075		132	2200	G $\frac{1}{2}$	C275-04HC
212	276	173	-	B+L080		138	2300	G $\frac{3}{4}$	C280-06HC
210	415	237	230	B+L095		480	8000	G1	C295-08HC



FRL unit, 3-part					P ₁ : max. 12.5 / 16 bar, P ₂ : 0...8 bar, 20 μ m, semiautomatic drain, with pressure gauge		C3		
126	208	126	-	F+R+L042	plastic/	59	980	G $\frac{1}{4}$	C342-02HC
178	239	148	189	F+R+L050	bowl guard	84	1100	G $\frac{3}{8}$	C350-03HC
178	239	148	189	F+R+L052		90	1500	G $\frac{1}{2}$	C352-04HC
215	276	173	227	F+R+L075		132	2200	G $\frac{1}{2}$	C375-04HC
288	276	173	-	F+R+L080		138	2300	G $\frac{3}{4}$	C380-06HC
325	411	237	345	F+R+L095		480	8000	G1	C395-08HC








Special options, add the appropriate letter

5 μm filter element		for C.42 to C.80	C...-0.G.
		for C.95	C.95-0.G.
0...12 bar regulating range		for C.42 to C.80	C...-0..D
		for C.95	C.95-0..D
automatic drain	C400200130	for all devices	C...-0...R
semiautomatic oil refilling	P _{min.} 3 bar	for C.42 to C.80	C...-0...X65
oil level indicator	P _{max.} 7 bar max. 115 V / NO	for C.50 to C.95	C...-0...X66


Accessories, enclosed

mounting bracket	made of steel, mounting nut at the device	for C.42	BW30-01
		for C.50 to C.80	BW42-01
set of brackets	made of steel, mounting nut at the device	for C.95	BW00-02

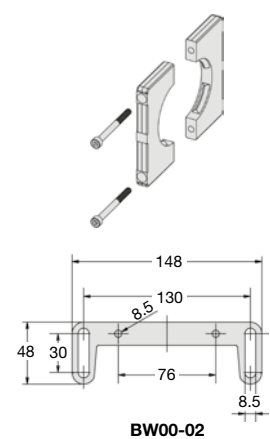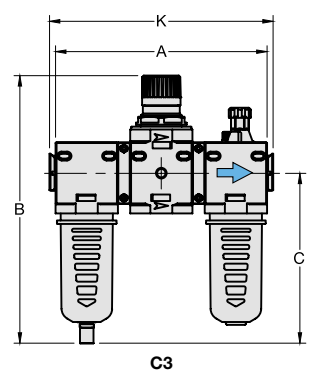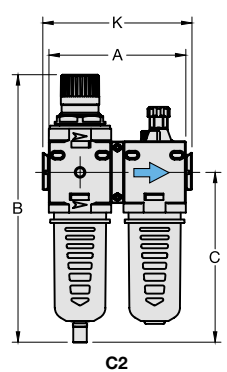


*1 at 10 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop
 *2 04 = 0...4 bar, 10 = 0...10 bar, 16 = 0...16 bar

Connection kit	With this interlocking kit, two compressed air instruments can be connected to one another without need for double nipples. This makes possible very compact layouts.
C35 :	<ul style="list-style-type: none"> Mounting using rotary clip and two o-rings. These allow regulators to be connected to other regulators or filters.
C40 :	<ul style="list-style-type: none"> Instruments are connected to each other using screws, nuts and o-ring; alternatively, a segmented connecting block can be used for instrument connection.
C50 :	<ul style="list-style-type: none"> Instrument connection by means of a two-part connecting block.
Branch plate	
C40 :	<ul style="list-style-type: none"> Branch plate with compressed air connection port G$\frac{1}{8}$ or G$\frac{1}{4}$ or both outlet plates. Supply plate for two pressure regulators through port G$\frac{1}{4}$.
C50 :	<ul style="list-style-type: none"> Branch plate with compressed air connection G$\frac{1}{4}$. Port installation of the branch plate is only possible using connecting blocks.

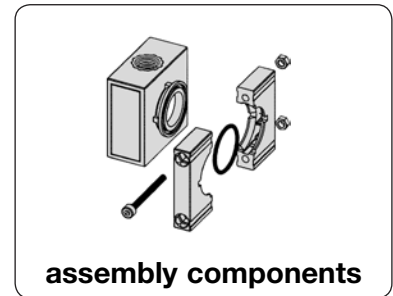


Description	Connection of instruments	for series	Order number
-------------	---------------------------	------------	--------------








Connection kit	for connecting separate instruments	C...	
rotary clips with two o-rings screws, nuts and o-ring	R+F or R+R or F+F	35	C350100018
	F+R+L or P+B+L	42	C400500001
	B+L	42	C400600001
	F+L or F+F	42	C400700001
connection kit	for any two instruments	42	C420600001
		50 / 52	C500600001
		75	C750600001
		80	C800600004
		95	C950600001

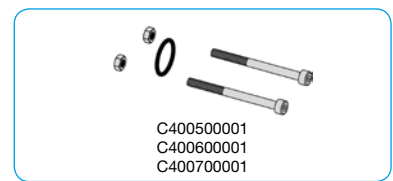

Branch plate	with compressed air connection port	C...	
outlet G $\frac{1}{8}$		42	C400500102
outlet G $\frac{1}{4}$		42	C400500108
outlet G $\frac{1}{8}$ and G $\frac{1}{4}$		42	C400500103
outlet G $\frac{1}{8}$ and G $\frac{1}{4}$	with connection kit	42	C420500003
supply G $\frac{1}{4}$ for two regulators		42	C400500111
outlet G $\frac{1}{4}$		50 / 52	C500500003
outlet G $\frac{1}{4}$		75	C750600002
outlet G $\frac{1}{4}$		80	C800600005

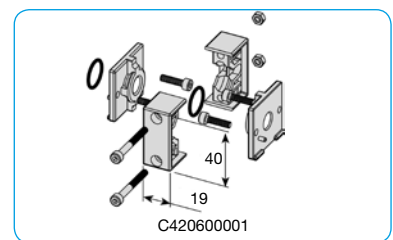

Mounting material			C...
mounting bracket		for G $\frac{1}{4}$	BW30-01
mounting bracket		for G $\frac{3}{8}$ to G $\frac{1}{2}$	BW42-01
wall mounting		for G $\frac{1}{4}$	C420500001
wall mounting		for G1	C950100018
bracket holder	required in absence of C9506	for G1	C950100015

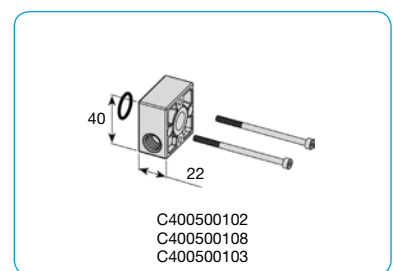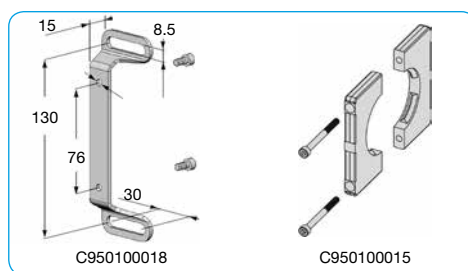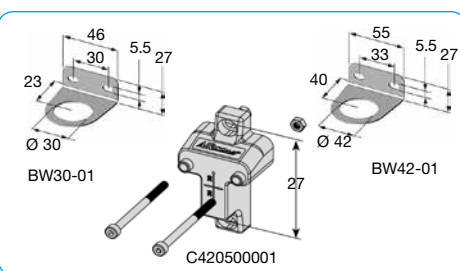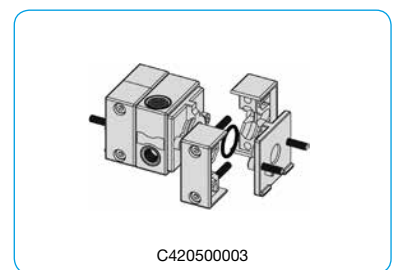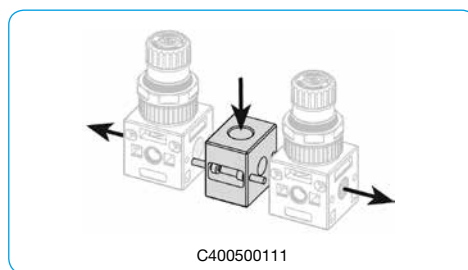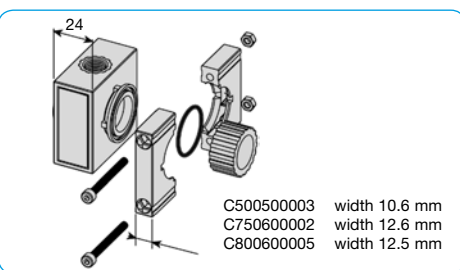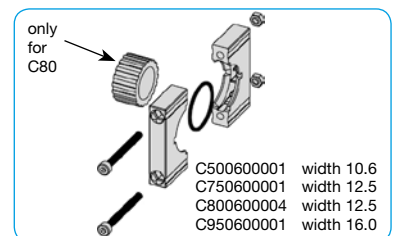

Manual switch-on


Manual switch-on/off valve which relieves at switch-off. Tapped exhaust with connection thread G $\frac{1}{8}$ or valve G $\frac{1}{4}$. Valve can be protected from unauthorised tampering by provided padlock. Wall mounting is possible through two drilled holes in the body. Maximum supply pressure is 15 bar.

Electric switch-on valve

The electrically-operated 3-port/2-way valve switches the air flow on or off. As standard, it is supplied with a miniature valve or alternatively with a CNOMO valve and can be operated purely in a pneumatic way as option. Wall mounting is possible through two drilled holes in the body. Tapped exhaust with connection thread G $\frac{1}{8}$ or G $\frac{1}{4}$. Maximum supply pressure is 3 to 10 bar.

Soft start valve

The soft start valve slowly pressurizes the system and switches over to full scale operation when 60% of the nominal pressure is reached. The pressure raising period can be set by an adjusting screw on top of the valve. Wall mounting is possible through two drilled holes in the body. Maximum supply pressure is 3 to 10 bar.

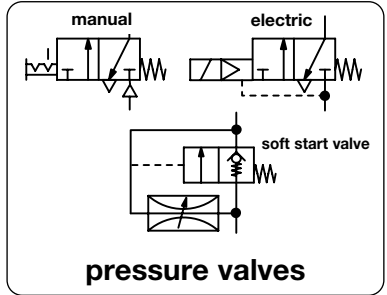

Dimensions			Description	Exhaust port	Flow rate		Connection thread	Order number
A	B	C			m ³ /h*1	l/min*1		

Manual 3-port/2-way valve				supply pressure max. 15 bar, including padlock			V0	
42	110	45	manual switch-on	G $\frac{1}{8}$	96	1600	G $\frac{1}{4}$	V042-02
63	121	36	and switch-off of the	G $\frac{1}{4}$	156	2600	G $\frac{3}{8}$	V050-03
63	121	36	compressed air circuit	G $\frac{1}{4}$	162	2700	G $\frac{1}{2}$	V052-04
75	138	42		G $\frac{1}{4}$	186	3100	G $\frac{1}{2}$	V075-04
137	138	42		G $\frac{1}{4}$	192	3200	G $\frac{3}{4}$	V080-06



V0 manual switch-on valve

Electric 3-port/2-way valve				24 V DC, 2 W, supply pressure 3...10 bar			S0	
42	143	42	electric switch-on	G $\frac{1}{8}$	96	1600	G $\frac{1}{4}$	S042-02
63	145	52	and switch-off of the	G $\frac{1}{4}$	156	2600	G $\frac{3}{8}$	S050-03
63	145	52	compressed air circuit	G $\frac{1}{4}$	162	2700	G $\frac{1}{2}$	S052-04
75	154	63		G $\frac{1}{4}$	186	3100	G $\frac{1}{2}$	S075-04
137	154	63		G $\frac{1}{4}$	192	3200	G $\frac{3}{4}$	S080-06



S0 electric switch-on valve


Soft start valve				supply pressure 3...10 bar			A0	
42	105	42	slow pressurizing of the		96	1600	G $\frac{1}{4}$	A042-02
63	108	52	pneumatic plant,		156	2600	G $\frac{3}{8}$	A050-03
63	108	52	delay time adjustable		162	2700	G $\frac{1}{2}$	A052-04
75	117	63			186	3100	G $\frac{1}{2}$	A075-04
137	117	63			192	3200	G $\frac{3}{4}$	A080-06



A0 soft start valve

Special options, add the appropriate letter


24 V AC, 2 W	input supply voltage	for S0	S0...-0.X
115 V AC, 1 W	input supply voltage	for S0	S0...-0.Y
230 V AC, 1 W	input supply voltage	for S0	S0...-0.Z
pneumatic control	C402600014, instead of electrical operation	for S0	S0...-0.P

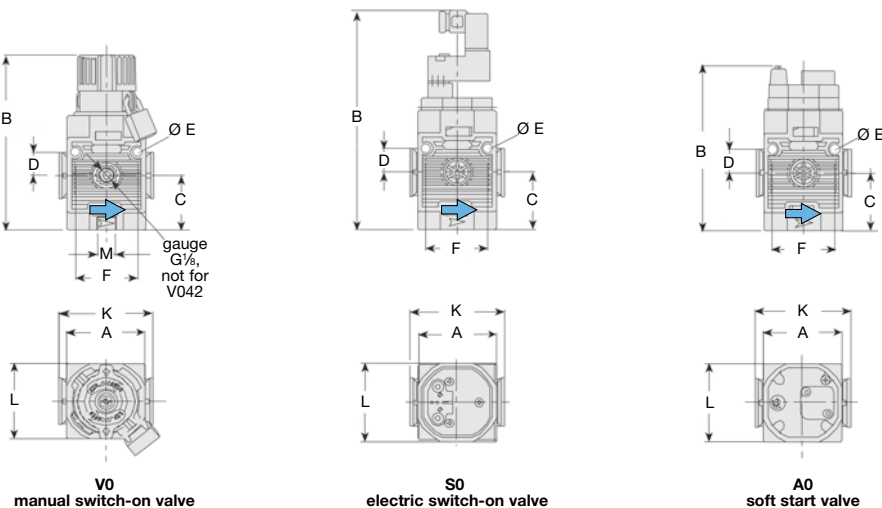

*1 at 10 bar supply pressure and 1 bar pressure drop

Series	D	Ø E	F	K	L
042	10.5	4.5	31	-	42
050/052	16	5.5	41	63	52
075	17.5	5.5	45	75	63
080	-	-	-	-	137

Description	FRL service unit of small design and high flow. Equipped with pressure gauge.		
Media	compressed air or non-corrosive gases		
Supply pressure	max. 11 bar for plastic bowl max. 17 bar for metal bowl with sight glass		
Adjustment	by plastic knob with snap-lock at C10, by T-handle with locknut at C11		
Relieving function	relieving, optionally non-relieving		
Gauge port	G $\frac{1}{4}$ on both sides of the body, one screw plug supplied		
Filter element	40 μ m, optionally 5 μ m, made of polypropylene		
Bowl	plastic version with or without bowl guard,	metal version with sight glass, optionally without	
Drainage	manual drain as standard for max. 21 bar,	automatic or semiautomatic drain as option for max. 12 bar	
Temperature range	0 °C to 50 °C / 32 °F to 122 °F for plastic bowl and automatic or semiautomatic drain version 0 °C to 70 °C / 32 °F to 158 °F for metal bowl with sight glass		
Material	Body: zinc die-cast	Elastomer: NBR/Buna-N	
	Spring cage: glass fibre-reinforced plastic at C10, zinc die-cast at C11	Inner valve: brass	
	Bowl: zinc die-cast or plastic		

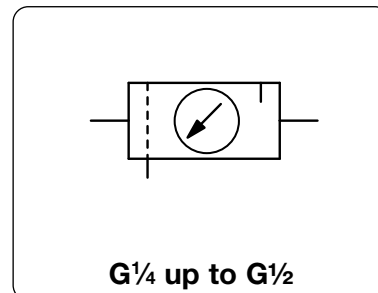

Dimensions			Combination consisting of	Bowl design made of / with	Flow rate		Connection thread	Order number
A	B	C			m 3 /h*1	l/min*1		

FRL unit, 2-part				P $_1$: max. 17 bar, P $_2$: 0.3...9 bar, 40 μ m, manual drain, relieving, with pressure gauge			C10	
176	235	146	B11+L606	metal/sight glass	66	1100	G $\frac{1}{4}$	C10-02BL-W
					114	1900	G $\frac{3}{8}$	C10-03BL-W
					132	2200	G $\frac{1}{2}$	C10-04BL-W


FRL unit, 3-part				P $_1$: max. 11/17 bar, P $_2$: 0.3...9 bar, 40 μ m, manual drain, relieving, with pressure gauge			C10	
206	185	146	F602+R10+L606	plastic	66	1100	G $\frac{1}{4}$	C10-02FRL-A
				plastic/bowl guard				C10-02FRL-B
				metal/sight glass				C10-02FRL-W
206	185	146	F602+R10+L606	plastic	102	1700	G $\frac{3}{8}$	C10-03FRL-A
				plastic/bowl guard				C10-03FRL-B
				metal/sight glass				C10-03FRL-W
206	185	146	F602+R10+L606	plastic	138	2300	G $\frac{1}{2}$	C10-04FRL-A
				plastic/bowl guard				C10-04FRL-B
				metal/sight glass				C10-04FRL-W

Special options, add the appropriate letter

T-handle	including locknut	C11-0.....
5 μm filter element		C10-0.....G
NPT	connection thread	C10-0.....N
0.2... 4 bar pressure range		C10-0.....B
0.5...17 bar pressure range		C10-0.....D
semiautomatic drain	RK500SY, max. 12 bar	C10-0.....M
automatic drain	SA605MD, max. 12 bar	C10-0.....R

Accessories, enclosed

mounting bracket	made of steel	BW45-02
mounting nut	made of plastic	M45x1,5K
	made of aluminium	M45x1,5A

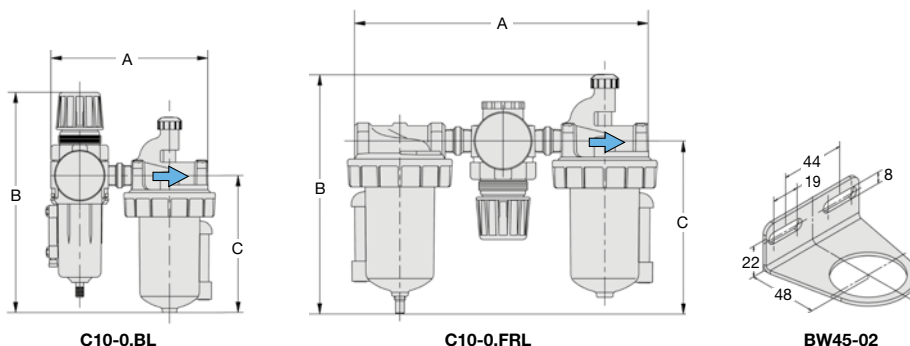

*1 at 8 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop

Further details: see chapter for single devices
Spare parts: see separate spare parts list


PDF CAD
www.aircom.net

Order example:
C10-02BL-W

"MAXI" FRL SERVICE UNIT

C20 / C21

Description	"Maxi" FRL service units with pressure gauge are of modular design with exchangeable insert kits and have a high flow rate. All "maxi" instruments are easy to take out of fixed piping by simply removing the two fastening bolts on the insert kits.	
Media	compressed air or non-corrosive gases	
Supply pressure	max. 17 bar	
Adjustment	by plastic knob with snap-lock at C20,	by T-handle with locknut at C21
Relieving function	relieving, optionally non-relieving	Filter element 40 µm, optionally 5 µm, made of polypropylene
Gauge port	G¼ on both sides of the body	Bowl metal version with sight glass
Drainage	manual drain as standard,	optionally automatic drain or semiautomatic drain for max. 12 bar
Temperature range	0 °C to 70 °C / 32 °F to 158 °F	
	0 °C to 50 °C / 32 °F to 122 °F for automatic	or semiautomatic drain version
Material	Body: zinc die-cast	Spring cage: zinc die-cast
	Knob (C20): glass fibre-reinforced plastic	T-handle (C21): steel
	Bowl: zinc die-cast	Sight glass: polyurethane
	Elastomer: NBR/Buna-N	Inner valve: brass and plastic

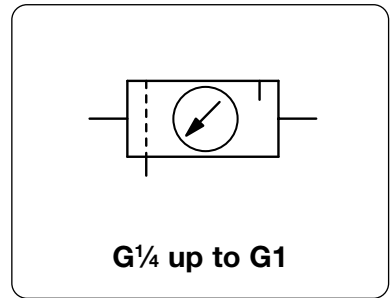

Dimensions			Combination consisting of	Bowl design made of / with	Flow rate m³/h*1	l/min*1	Connection thread G	Order number
A	B	C						

FRL unit, 2-part				P1: max. 17 bar, P2: 0.3...9 bar, 40 µm, manual drain, relieving, with pressure gauge			C20	
178	289	175	B+L20	metal / sight glass	102	1700	G¼	C20-02BL-W
					174	2900	G¾	C20-03BL-W
					276	4600	G½	C20-04BL-W
203	289	175	B+L20	metal / sight glass	390	6500	G¾	C20-06BL-W
					402	6700	G1	C20-08BL-W



FRL unit, 3-part				P1: max. 17 bar, P2: 0.3...9 bar, 40 µm, manual drain, relieving, with pressure gauge			C20	
270	226	171	F+R+L20	metal / sight glass	102	1700	G¼	C20-02FRL-W
					174	2900	G¾	C20-03FRL-W
					276	4600	G½	C20-04FRL-W
292	226	171	F+R+L20	metal / sight glass	390	6500	G¾	C20-06FRL-W
					402	6700	G1	C20-08FRL-W







Special options, add the appropriate letter

T-handle	including locknut	C21-0 -W
5 µm filter element		C20-0 -WG
NPT	connection thread	C20-0 -WN
0.2... 4 bar pressure range		C20-0 -WB
0.5...17 bar pressure range		C20-0 -WD
semiautomatic drain	RK500SY, max. 12 bar	C20-0 -WM
automatic drain	SA605MD, max. 12 bar	C20-0 -WR

Accessories, enclosed

mounting bracket	mounting at the spring cage	BW45-02
mounting nut	made of aluminium	M45x1,5A
mounting bracket set	made of steel, consisting of two mounting brackets	MK20-0100
porting block	tap G¼, for unlubricated compressed air	IK20CP

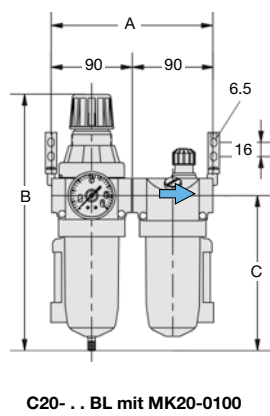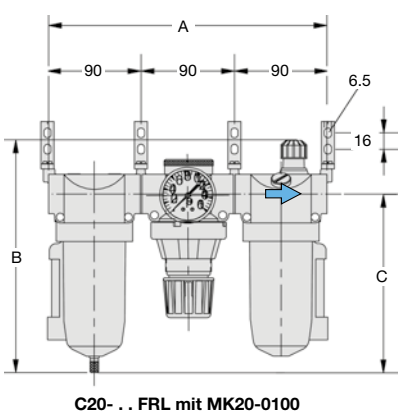


*1 at 8 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop

Further details: see chapter for single devices
Spare parts: see separate spare parts list

PDF CAD
www.aircom.net

Order example: C20-02BL-W

Description Solid, low-cost FRL service unit made of zinc die-cast equipped with pressure gauge.
Media compressed air or non-corrosive gases
Supply pressure max. 16 bar for metal bowl with sight glass, max. 30 bar for metal bowl without sight glass
Adjustment by plastic knob with snap-lock up to G $\frac{1}{2}$
 by hexagon head screw from G $\frac{3}{8}$ up to G1 $\frac{1}{2}$ on (CD.-1A.)
 by T-handle from G1 $\frac{1}{2}$ (CD.-12.) up to G2 on
Relieving function relieving, optionally non-relieving
Gauge port G $\frac{1}{4}$ or G $\frac{1}{2}$ at CD.-01/-02, on both sides of the body, one screw plug supplied
Filter element 20 μ m or 50 μ m, optionally 5 μ m or 50 μ m, made of propylene **Bowl** metal version with or without sight glass
Drainage semiautomatic drain as standard, optionally automatic (max. 16 bar) or manual drain for max. 30 bar
Temperature range -10 °C to 50 °C / -14 °F to 122 °F metal bowl with sight glass, for G $\frac{1}{2}$ to G $\frac{3}{2}$
 -20 °C to 60 °C / -4 °F to 140 °F metal bowl with sight glass, for G $\frac{3}{8}$ to G2
 -30 °C to 80 °C / -22 °F to 176 °F metal bowl without sight glass, for all sizes
Material Body: zinc die-cast at G $\frac{1}{2}$ and G $\frac{3}{4}$, aluminium at G $\frac{3}{2}$ up to G2
 Elastomer: NBR/Buna-N
 Bowl: zinc die-cast



G $\frac{1}{8}$ up to G2

Dimensions			Combination consisting of	Bowl design made of / with	Filter element	Flow rate		Connection thread G	Order number
A	B	C				m ³ /h*1	l/min*1		

FRL unit, 2-part

P₁: max. 16 bar, P₂: 0.8...8 bar, 20 / 50 μ m, semiautomatic drain, relieving, with gauge

CD2

80	201	128	BD+LD	metal/sight glass	20	27	450	G $\frac{1}{8}$ G $\frac{1}{4}$	CD2-01 CD2-02
128	248	148		metal/sight glass	50	108	1800	G $\frac{3}{8}$ G $\frac{1}{2}$	CD2-03 CD2-04
275	314	179		metal/sight glass	50	300	5000	G $\frac{3}{4}$ G1	CD2-06 CD2-08
386	314	179		metal/sight glass	50	300	5000	G1 $\frac{1}{4}$ G1 $\frac{1}{2}$	CD2-10 CD2-1A
355	483	223		metal/sight glass	50	960	16000	G1 $\frac{1}{2}$ G2	CD2-12 CD2-16



CD2-01/-02



CD2-03/-04




CD2-10/-1A

Special options, add the appropriate letter


5 μ m filter element		for G $\frac{1}{8}$ up to G $\frac{1}{2}$ for G $\frac{3}{4}$ up to G1 for G1 $\frac{1}{4}$ up to G2	CD2-...G CD2-...G CD2-...G
0.3...3 bar regulation range			CD2-...B
1...15 bar operating press. 30 bar	only for metal bowl (without sight glass) with manual drain		CD2-...E
manual drain	max. 16 bar		CD2-...NH
automatic drain	drainage by float valve, max. 16 bar	for G $\frac{3}{8}$ up to G2	CD2-...H CD2-...R

Accessories, enclosed


mounting bracket	made of steel	for G $\frac{1}{8}$ and G $\frac{1}{4}$	BW30-02
mounting nut	made of plastic	for G $\frac{1}{8}$ and G $\frac{1}{4}$	M30x1,5K
mounting bracket	made of steel	for G $\frac{3}{8}$ and G $\frac{1}{2}$	BW50-03
mounting nut	made of plastic	for G $\frac{3}{8}$ and G $\frac{1}{2}$	M50x1,5K
mounting bracket	made of stainless steel	for G $\frac{3}{4}$ up to G1 $\frac{1}{2}$ (1A)	BW00-59S
set of brackets	made of steel	for G1 $\frac{1}{2}$ (12) and G2	BW00-61



CD2-01/-.../-04



CD2-06/-08/-10/-1A



CD2-12/-16

*1 at 8 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop


Further details: see chapter for single devices
 Spare parts: see separate spare parts list

PDF CAD
www.aircom.net



Order example:
 CD2-01

Description	Solid, low-cost FRL service unit made of zinc die-cast equipped with pressure gauge.
Media	compressed air or non-corrosive gases
Supply pressure	max. 16 bar for metal bowl with sight glass, max. 30 bar for metal bowl without sight glass
Adjustment	by plastic knob with snap-lock up to G $\frac{1}{2}$ by hexagon head screw from G $\frac{3}{8}$ up to G1 $\frac{1}{2}$ on (CD.-1A.) by T-handle from G1 $\frac{1}{2}$ (CD.-12.) up to G2 on
Relieving function	relieving, optionally non-relieving
Gauge port	G $\frac{1}{4}$ or G $\frac{1}{2}$ at CD.-01/-02, on both sides of the body, one screw plug supplied
Filter element	20 μ m or 50 μ m, optionally 5 μ m or 50 μ m, made of propylene Bowl metal version with or without sight glass
Drainage	semiautomatic drain as standard, optionally automatic (max. 16 bar) or manual drain for max. 30 bar
Temperature range	-10 °C to 50 °C / 14 °F to 122 °F metal bowl with sight glass, for G $\frac{1}{2}$ to G $\frac{3}{2}$ -20 °C to 60 °C / -4 °F to 140 °F metal bowl with sight glass, for G $\frac{3}{8}$ to G2 -30 °C to 80 °C / -22 °F to 176 °F metal bowl without sight glass, for all sizes
Material	Body: zinc die-cast at G $\frac{1}{2}$ and G $\frac{3}{4}$, aluminium at G $\frac{1}{2}$ up to G2 Elastomer: NBR/Buna-N Bowl: zinc die-cast

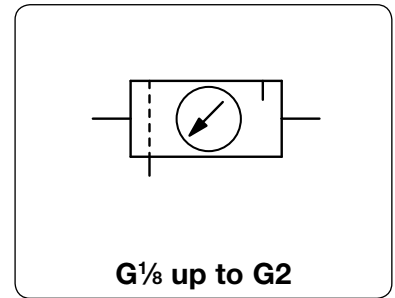

Dimensions			Combination	Bowl	Filter	Flow	Connection	Order
A	B	C	consisting	design	element	rate	thread	number
mm	mm	mm	of	made of / with		m ³ /h*1	G	

FRL unit, 3-part				P ₁ : max. 16 bar, P ₂ : 0.8...8 bar, 20 / 50 μ m, semiautomatic drain, relieving, with gauge				CD3	
120	201	128	FD+RD+LD	metal/sight glass	20	24	400	G $\frac{1}{8}$ G $\frac{1}{4}$	CD3-01 CD3-02
192	251	148		metal/sight glass	50	108	1800	G $\frac{3}{8}$ G $\frac{1}{2}$	CD3-03 CD3-04
427	312	179		metal/sight glass	50	228	3800	G $\frac{3}{4}$ G1	CD3-06 CD3-08
531	312	179		metal/sight glass	50	228	3800	G1 $\frac{1}{4}$ G1 $\frac{1}{2}$	CD3-10 CD3-1A
495	486	231		metal/sight glass	50	1320	22000	G1 $\frac{1}{2}$ G2	CD3-12 CD3-16






Special options, add the appropriate letter

5 μm filter element		for G $\frac{1}{8}$ up to G $\frac{1}{2}$	CD3-...G
		for G $\frac{3}{4}$ up to G1	CD3-...G
		for G1 $\frac{1}{4}$ up to G2	CD3-...G
0.3...3 bar regulation range			CD3-...B
1...15 bar			CD3-...E
operating press. 30 bar	only for metal bowl (without sight glass) with manual drain		CD3-...NH
manual drain	max. 16 bar		CD3-...H
automatic drain	drainage by float valve, max. 16 bar	for G $\frac{3}{8}$ up to G2	CD3-...R

Accessories, enclosed

mounting bracket	made of steel	for G $\frac{1}{8}$ and G $\frac{1}{4}$	BW30-02
mounting nut	made of plastic	for G $\frac{1}{8}$ and G $\frac{1}{4}$	M30x1,5K
mounting bracket	made of steel	for G $\frac{3}{8}$ and G $\frac{1}{2}$	BW50-03
mounting nut	made of plastic	for G $\frac{3}{8}$ and G $\frac{1}{2}$	M50x1,5K
mounting bracket	made of stainless steel	for G $\frac{3}{4}$ up to G1 $\frac{1}{2}$ (1A)	BW00-59S
set of brackets	made of steel	for G1 $\frac{1}{2}$ (12) and G2	BW00-61



*1 at 8 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop


Further details: see chapter for single devices
Spare parts: see separate spare parts list

PDF CAD
www.aircom.net



Order example:
CD3-01

Description	FRL service unit of small size and with high flow. Solid design, proven in operation.		
Media	compressed air, non-corrosive gases or liquids		
Supply pressure	max. 17 bar for metal bowl with sight glass		
Adjustment	by T-handle with locknut,	by plastic knob with snap-lock on pilot regulator at size G2	
Relieving function	relieving, optionally non-relieving Air consumption only for pilot pressure at size G2		
Gauge port	G $\frac{1}{4}$ on both sides of the body, one screw plug supplied		
Filter element	40 μ m, optionally 5 μ m, made of polypropylene		
Bowl	metal version with sight glass		
Drainage	manual drain as standard	for max. 21 bar	
	optionally internal automatic drain	for max. 12 / 16 bar	
	or external automatic drain	for max. 18 bar	
Temperature range	0 °C to 70 °C / 32 °F to 158 °F for metal bowl with sight glass		
Material	Body: zinc die-cast	Elastomer: NBR/Buna-N	
	Bowl: polyurethane, zinc die-cast or steel	Inner valve: brass	

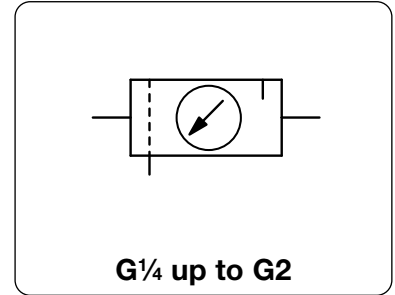

Dimensions			Combination consisting of	Bowl design made of/with	Flow rate		Connection thread	Order number
A	B	C			m ³ /h*1	l/min*1		

FRL unit, 3-part				P: max. 17 bar, P ₂ : 0.3...9 bar, 40 μ m, manual drain, relieving, with pressure gauge			C630	
400	267	197	F602 + R119, + L606	metal/sight glass	408	6 800	G $\frac{3}{4}$	C630-06FRL-W
					516	8 600	G1	C630-08FRL-W
419	286	206		metal/sight glass	600	10 000	G1 $\frac{1}{4}$	C630-10FRL-W
					630	10 500	G1 $\frac{1}{2}$	C630-12FRL-W
485	425	356		metal/sight glass	1 590	26 500	G2	C630-16FRL-W





Special options, add the appropriate letter

5 μ m filter element		C630-0 G
NPT connection thread		C630-0 N
0.2... 4 bar pressure range		C630-0 B
0.5...17 bar pressure range		C630-0 D
semiautomatic drain	RK500SY, max. 12 bar	C630-0 M
automatic drain	SA605MD, max. 12 bar	C630-0 R
flange connection	see chapter for stainless steel devices / flanges	C630-0 F



Accessories, enclosed

mounting bracket	made of steel	for G $\frac{3}{4}$ to G1 $\frac{1}{2}$	BW00-24
------------------	---------------	---	----------------

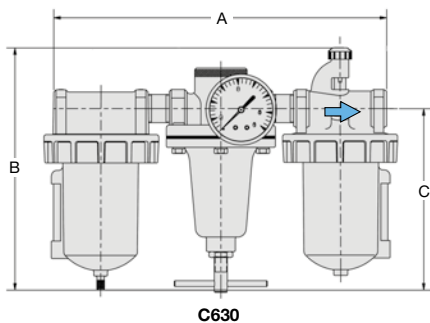

*1 at 8 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop

Further details: see chapter for single devices
Spare parts: see separate spare parts list

PDF CAD
www.aircom.net


Order example:
C630-06FRL-A

Manual drain The manual drain can be opened by screwing it into the bowl.
Once the collected condensate reaches the drain hole, it is being relieved.

Semiautomatic drain The semiautomatic drain semiautomatically separates condensates from compressed air or gas systems.
After operating pressure switch-off the drain valve opens and the collected condensate is being relieved.

Automatic drain The automatic drain fully automatically separates condensates from compressed air or gas systems.
Once the float lifts from the valve seat caused by the condensate level, the condensate is being relieved.
Operating pressure must be 2 bar minimum.

Temperature range 0 °C to 50 °C / 32 °F to 122 °F
0 °C to 80 °C / 32 °F to 176 °F for manual drain made of brass
for appropriately conditioned compressed air down to -30 °C / -22 °F

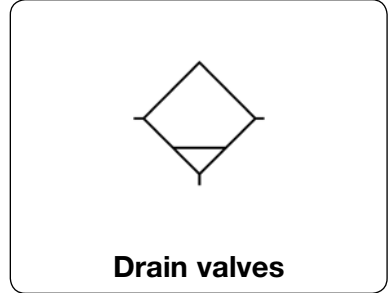

Valve type	Description	For filter/ filter regulator	For bowl type	Operating pressure max. bar	Order number
------------	-------------	---------------------------------	------------------	-----------------------------------	-----------------

Drain valves		1/8"-27 NPSM thread of internal valve			SA/RK	
manual drain	made of brass	F20/ F504/F602 / B11/B12/B20/B21/ B548	all	21	SA600Y-71	
	made of plastic	F20/ F504/F602/ B11/B12/B20/B21/ B548	all	21	AWF-10	
semiautomatic drain	piston drain	F504	all	12	RK504SY	
		F602-02/-03	A/B/W	12	RK602SY	
	drainage after pressure switch-off	B11/B12	all	12	4210	
		F20	all	12	4212	
spring-loaded	F20/ F20/ F504/F602/ B11/B12/B20/B21/ B548	all	12	RK504SY		
	F20/ F20/ F504/F602/ B11/B12/B20/B21/ B548	all	12	RK500SY		
	automatic drain	internal mounting	F20/F602/B11/ B12/B20/B21/ F20/F602/ B20/B21	all	12	SA605MD
		effective from 2 bar on	F20/F602/ B20/B21	all	16	SA702MD
external mounting	F602-04 to -20	A/B/W	18	SA602D		
	F602-04 to -20	E/F	18	SA603D		



Drain valves made of SST		1/8"-27 NPSM valve thread			SA
automatic drain	internal mounting effective from 2 bar on	F10/F11/B11-S	all	12	SA10MDSS



Description Air supply is immediately shut off when volume flow exceeds a specific value. The maximum admissible flow is factory-set in such a way that a standard application of pneumatic equipment is ensured. Pressure drop amounts to 0.05 to 0.3 bar. In the case of failure, the hose rupture valve blows off through a small nozzle. After repairing the hose break, the hose rupture valve can be set to zero again.

EN ISO 4414-11.2010 According to EN ISO 4414-11.2010 the hose rupture valve protects individuals, systems and machines from injuries or damages caused by lashing hose lines in the event of hose breaks.

Function The air passes the piston and continues through the seat. The air stream is slowed down by means of lengthwise grooves on the piston surface. When the volume flow is too high, the air cannot pass the piston quickly enough, thus the piston will be pressed against the spring. If the maximum admissible flow is exceeded, e.g. when the hose suddenly breaks, the air supply will automatically be shut off.

Supply pressure max. 18 bar
Temperature range -20 °C to 80 °C / -4 °F to 176 °F at G¼ to G½, up to 120 °C / 248 °F at G¾ to G2
Material Body: aluminium, optionally stainless steel Elastomer: NBR/Buna-N
 Inner valve: aluminium and plastic




max. 18 bar
G¼ up to G2

Dimensions			max. flow rate		Connection thread	Order number
B	C	A/F	at 8 bar *2			
mm	mm	mm	m³/h	l/min	G	

Hose Rupture Valve "HoseGuard®"						operating pressure max. 18 bar	281
49	-	22	46	760 *1	G¼	281A0211	
49	10	22	46	760 *1	G¼ai	281A0221	
49	-	22	3	52	G¼	281ZL0211	
49	10	22	3	52	G¼ai	281ZL0221	
49	-	22	60	990	G¼	281ZH0211	
49	10	22	60	990	G¼ai	281ZH0221	
58	-	27	65	1080 *1	G¾	281A0311	
58	12	27	65	1080 *1	G¾ai	281A0321	
58	-	27	87	1450	G¾	281ZH0311	
58	12	27	87	1450	G¾ai	281ZH0321	
65	-	30	181	3020 *1	G½	281A0411	
64	15	30	181	3020 *1	G½ai	281A0421	
65	-	30	206	3440	G½	281ZH0411	
64	15	30	206	3440	G½ai	281ZH0421	
76	-	30	244	4070 *1	G¾	281A0511	
76	-	30	315	5250	G¾	281ZH0511	
100	-	41	313	5220 *1	G1	281A0611	
100	-	41	456	7600	G1	281ZH0611	
130	-	70	775	12920 *1	G2	281A0911	





281

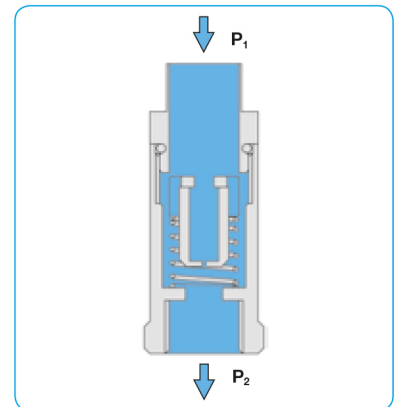



cross-section

Special options, add the appropriate letter

- NPT** connection thread for standard version 281A1 . . .
- connection thread for Low-Flow version 281ZL1 . . .
- connection thread for High-Flow version 281ZH1 . . .
- stainless steel body** 281R . . .

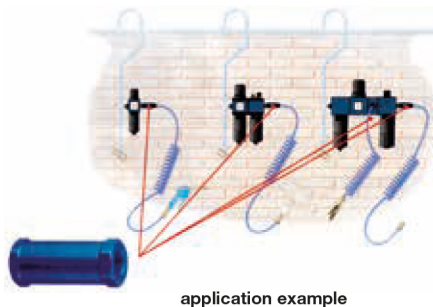

application example

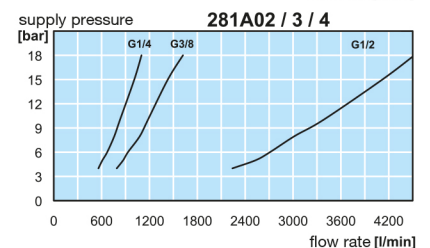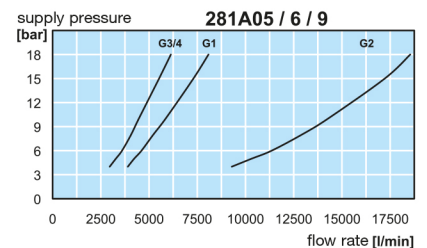

*1 Standard version

*2 volume flow measurement according to DIN EN60534 (± 10% for closing)