



<b>Manual drain</b>	The manual drain can be opened by screwing it into the bowl. Once the collected condensate reaches the drain hole, it is being relieved.
<b>Semiautomatic drain</b>	The semiautomatic drain semiautomatically separates condensates from compressed air or gas systems. After operating pressure switch-off the drain valve opens and the collected condensate is being relieved.
<b>Automatic drain</b>	The automatic drain fully automatically separates condensates from compressed air or gas systems. Once the float lifts from the valve seat caused by the condensate level, the condensate is being relieved. Operating pressure must be 2 bar minimum.
<b>Temperature range</b>	0 °C to 50 °C / 32 °F to 122 °F 0 °C to 80 °C / 32 °F to 176 °F for manual drain made of brass for appropriately conditioned compressed air down to -30 °C / -22 °F

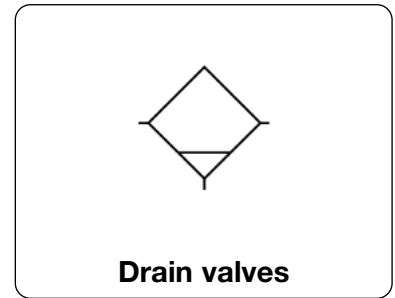

Valve type	Description	For filter/ filter regulator	For bowl type	Operating pressure max. bar	Order number	B*
------------	-------------	---------------------------------	------------------	-----------------------------------	-----------------	----

Drain valves		1/8"-27 NPSM thread of internal valve			SA/RK
<b>manual drain</b>	made of brass	F20/ F504/F602 / B11/B12/B20/B21/ B548	all	21	<b>SA600Y-71</b>
	made of plastic	F20/ F504/F602/ B11/B12/B20/B21/ B548	all	21	<b>AWF-10</b>
<b>semiautomatic drain</b>	piston drain	F504	all	12	<b>RK504SY</b>
		F602-02/-03	A/B/W	12	<b>RK602SY</b>
	drainage after pressure switch-off	B11/B12	all	12	<b>4210</b>
		F20/ spring-loaded	F20/ all	all	12
<b>automatic drain</b>	internal mounting effective from 2 bar on	F20/ F504/F602/ B11/B12/B20/B21/ B548	all	12	<b>SA605MD</b>
		F20/F602/B11/ B12/B20/B21/ B20/B21	all	16	<b>SA702MD</b>
	external mounting	F602-04 to -20	A/B/W	18	<b>SA602D</b>
		F602-04 to -20	E/F	18	<b>SA603D</b>

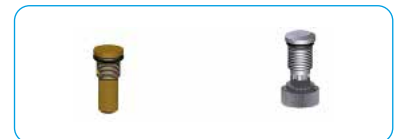

Drain valves made of SST		1/8"-27 NPSM valve thread			SA
<b>automatic drain</b>	internal mounting effective from 2 bar on	F10/F11/B11-S	all	12	<b>SA10MDSS</b>



\* Product group

PDF CAD  
www.aircom.net



Order example:  
**SA600Y-71**