


MICRO-/ MINIATURE-DEVICES

	DESCRIPTION	DN/Ø	FLOW RATE l/min	CONNECTION thread	SERIES	PAGE
NEEDLE VALVE	made of stainless steel, miniature	Ø 3.0 - 4.5	0 ... 32	nipple	NV30	20.02
PRECISION RESTRICTOR	made of brass, micro	Ø 0.06 - 0.64		nipple, 10-32"	RF	20.03
	made of plastic	Ø 0.08 - 1.02		nipple	R-0	20.04
	with filter	Ø 0.10 - 0.76		nipple	F950	20.04
INLINE-FILTER	micro, up to 8.6 bar	5 ... 73 µm		nipple, 10-32"	F9 . .	20.05
CHECK VALVE	micro, up to 5.2 bar	1,5 / 3,8		nipple	F2804	20.06
	restrictor check valve	0.1/ ... / 1.02		10-32"	F2804	20.06



20

Description	The precision needle valve is an manually adjustable flow control valve used in pneumatic and fluid systems. Unique laminar flow design ensures sensitive reproducible control. Ideal for precision gas metering and circuit speed or sequencing control.		
Media	5 µm filtered compressed air, non-corrosive gases or liquids		
Operating pressure	vacuum up to positive pressure of max. 12 bar		
Adjustment	The flow control needle needs 8 screw turns for maximum flow, approximately equal to an 0.65 mm / 0.025" orifice.		
Panel mounting	borehole 8 mm / 0.312", max. panel thickness 3.5 mm / 0.15"		
Temperature range	-40 °C to 95 °C / -40 °F to 203 °F		
Material	Body and needle: stainless steel 303 Elastomer: NBR/Buna-N		



Ø 0 ... 0.65 mm
compressed air or liquids

Flow adjustment mit	Operating pressure max. bar	Volume flow at 3.5 bar and 6 turns l/min	Nipple diameter Ø mm inch	Order number	
------------------------	--------------------------------	--	---------------------------------	--------------	--

Needle valve with knurled screw

operating pressure max. 12 bar,
stainless steel, Ø 0 ... 0.65 mm

NV30-K

knurled-head

12

0 ... 32

4.5

1/8"

NV30-4K



NV30-4K
with knurled-head

Needle valve with slotted screw

operating pressure max. 12 bar,
stainless steel, Ø 0 ... 0.65 mm

NV30-S

slotted screw

12

0 ... 32


4.5

1/8"


NV30-4S



NV30-4S
with slotted screw

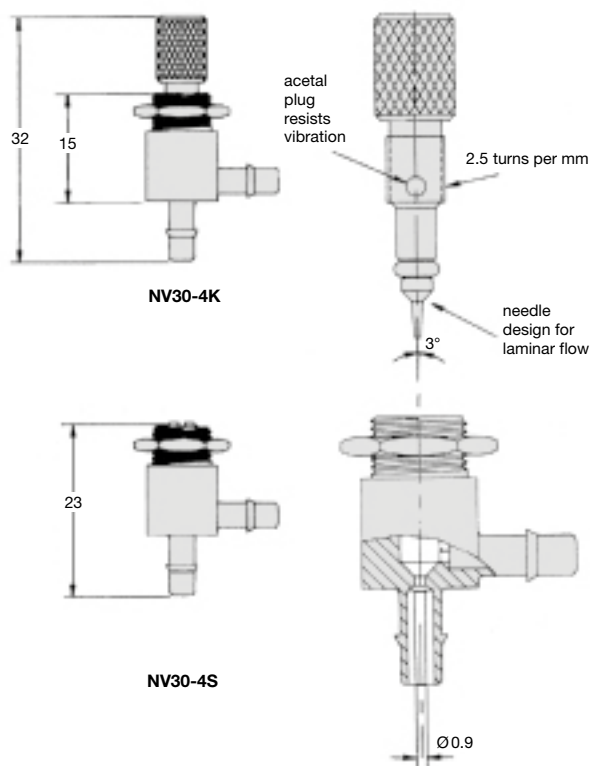

NV30-4K

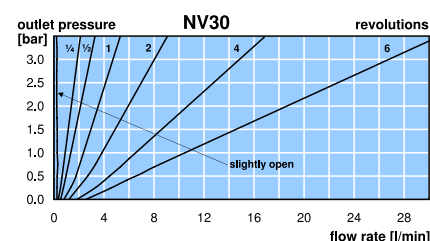

* Product group

PDF CAD
www.aircom.net



Order example:
NV30-4K

Description	Precision sapphire restrictor for reducing the flow of air or gas. Fixed flow restrictors are used in back pressure and air jet sensing circuits.		
Media	5 µm filtered compressed air, non-corrosive gases or liquids		
Diameter tolerances	-3% to +10% of nominal diameter		
Operating pressure	vacuum up to positive pressure of max. 12 bar		
Temperature range	5 °C to 50 °C / 41 °F to 122 °F		
Material	Body: brass	Restrictor: sapphire	



Ø 0.06 up to 0.64 mm
compressed air or liquids

Nominal size Ø mm	Order number				D*
	10-32" / nipple Ø 2 RF1	nipple Ø 2.2 RF2	10-32" RF3	10-32" / open orifice RF4	

Restrictor

operating pressure max. 12 bar

RF


				
0.06	RF106	RF206	RF306	RF406
0.07	RF107	RF207	RF307	RF407
0.08	RF108	RF208	RF308	RF408
0.09	RF109	RF209	RF309	RF409
0.10	RF110	RF210	RF310	RF410
0.11	RF111	RF211	RF311	RF411
0.12	RF112	RF212	RF312	RF412
0.13	RF113	RF213	RF313	RF413
0.14	RF114	RF214	RF314	RF414
0.15	RF115	RF215	RF315	RF415
0.16	RF116	RF216	RF316	RF416
0.17	RF117	RF217	RF317	RF417
0.18	RF118	RF218	RF318	RF418
0.20	RF120	RF220	RF320	RF420
0.22	RF122	RF222	RF322	RF422
0.24	RF124	RF224	RF324	RF424
0.26	RF126	RF226	RF326	RF426
0.28	RF128	RF228	RF328	RF428
0.30	RF130	RF230	RF330	RF430
0.32	RF132	RF232	RF332	RF432
0.34	RF134	RF234	RF334	RF434
0.36	RF136	RF236	RF336	RF436
0.40	RF140	RF240	RF340	RF440
0.44	RF144	RF244	RF344	RF444
0.48	RF148	RF248	RF348	RF448
0.52	RF152	RF252	RF352	RF452
0.54	RF154	RF254	RF354	RF454
0.58	RF158	RF258	RF358	RF458
0.64	RF164	RF264	RF364	RF464




RF2 RF1
with nipple




RF3 RF4
with connection thread




RF1




RF2



RF3



RF4

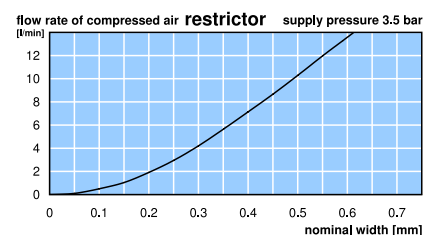

* Product group

PDF CAD
www.aircom.net



Order example:
RF106

Description

Medium

Filter element

Operating pressure

Material

Precision sapphire restrictor for reducing the flow

compressed air or non-corrosive gases

Ø-Tolerance ± 0.005 mm respectively ± 3% of volume flow

5 µm for DN0.08 up to DN0.23, from DN0.25 on 100 µm

vacuum up to max. 7 bar

Body: polycarbonate, FDA-approved

Temperature range 5 °C to 50 °C / 41 °F to 122 °F

Restrictor: polycarbonate Filter element: stainless steel fabric

Restrictor with Filter F950

Description

Disposable in-line-filter with Dutch weave screen of 304 stainless steel.

Flow direction and filter size in µm are clearly marked. The colour indicates the nominal size.

Diameter tolerance

-3% to +10% of nominal diameter

Filter element

5 µm at DN 0.10 to DN 0.15, 43 µm at DN 0.18 to DN 0.41, 73 µm at DN 0.51 to DN 0.76

Operating pressure

max. 7 bar

Temperature range 5 °C to 50 °C / 41 °F to 122 °F


Material

Body: polysulphone

Filter element: stainless steel fabric

R-0

F950



0.08 up to
1.02 mm

0.1 up to 0.76 mm
5 / 43 / 73 µm

Dimensions

A

mm

Connection

inlet / outlet

Nominal size

colour / DN

Ø mm

Order

number

Nominal size

colour / DN

Ø mm

Order

number




Restrictor, barbed fittings Ø 2.7

operating pressure max 7 bar

R-0...-6

30

fittings Ø 2.7



gold 0.08

R-003-6

orange 0.36

R-014-6

purple 0.10

R-004-6

grey 0.41

R-016-6

white 0.13

R-005-6

brown 0.43

R-017-6

yellow 0.18

R-007-6

red 0.48

R-019-6

light green 0.20

R-008-6

dark blue 0.51

R-020-6

lavender 0.23

R-009-6

black 0.64

R-025-6

light blue 0.25

R-010-6

beige 0.76

R-030-6

green 0.30

R-012-6

dark grey 0.89

R-035-6

cyan 1.02

R-040-6



R-0...-1 R-0...-6
with nipple


Restrictor, barbed fittings Ø 4,7

operating pressure max 7 bar

R-0...-1

34

fittings Ø 4.7



gold 0.08

R-003-1

orange 0.36

R-014-1

purple 0.10

R-004-1

grey 0.41

R-016-1

white 0.13

R-005-1

brown 0.43

R-017-1

yellow 0.18

R-007-1

red 0.48

R-019-1

light green 0.20

R-008-1

dark blue 0.51

R-020-1

lavender 0.23

R-009-1

black 0.64

R-025-1

light blue 0.25

R-010-1

beige 0.76

R-030-1

green 0.30

R-012-1

dark grey 0.89

R-035-1

cyan 1.02

R-040-1



R-0...-0
with plain fittings


Restrictor with filter

operating pressure max. 7 bar
nipple Ø 2.7 mm, 5/43/73 µm

F950

26

fittings Ø 2.7



purple 0.10

5 µm

F950- 5-041-B80

light green 0.13

5 µm

F950- 5-050-B80

red 0.15

5 µm

F950- 5-051-B80

cyan 0.18

43 µm

F950-43-071-B80

yellow 0.25

43 µm

F950-43-101-B80

black 0.30

43 µm

F950-43-121-B80

grey 0.41

43 µm

F950-43-161-B80

blue 0.51

73 µm

F950-73-201-B80

brown 0.64

73 µm

F950-73-251-B80

beige 0.76

73 µm

F950-73-301-B80



F950...B85 / ...B80
with filter

Special options, add the appropriate letter

plain fittings Ø 2.3

A = 9.9 mm



for R-0

R-0...-0


nipple Ø 4.7

A = 30 mm




for F950


F950-...-...-B85



plain fittings
R-0...-0






barbed fittings Ø 2.7
R-0...-6
F950-...-...B80



barbed fittings Ø 4.7
R-0...-1
F950-...-...B85

*1 nominal size see RF2

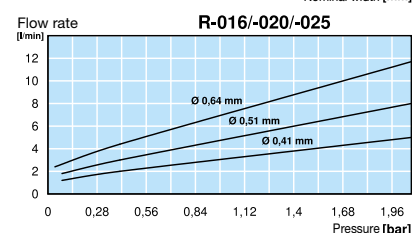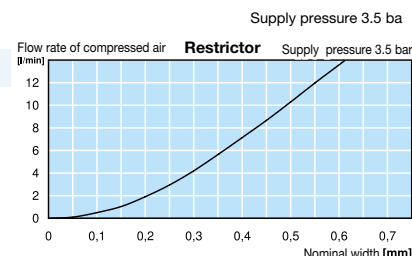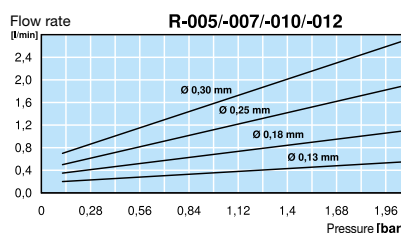

* Product group

PDF CAD
www.aircom.net



Order example:
R-003-6

Description Compact in-line filter with fittings or threaded connection.
Flow direction and filter size in μm are clearly marked.

Media compressed air or non-corrosive gases


Diameter tolerances -3% to +10% of nominal diameter

Filter element 5 μm , 25 μm , 43 μm or 73 μm

Operating pressure max. 8.6 bar

Temperature range 5 °C to 50 °C / 41 °F to 122 °F

Material Body: polysulphone Filter element: Dutch weave stainless steel



**5/25/43/73 μm
compressed air or gases**

Dimensions A mm	Operating pressure max. bar	Connection inlet / outlet	Filter element μm	Order number
-----------------------	-----------------------------------	------------------------------	------------------------------------	-----------------




Micro pressure filter

operating pressure max. 8.6 bar

F900

26	8.6	fittings $\varnothing$ 2.7	5	F950-05B80
			25	F950-25B80
			43	F950-43B80
			73	F950-73B80
30	8.6	fittings $\varnothing$ 4.7	5	F950-05B85
			25	F950-25B85
			43	F950-43B85
			73	F950-73B85
24	8.6	10-32" / fittings $\varnothing$ 2.7	5	F960-05B80
			25	F960-25B80
			43	F960-43B80
			73	F960-73B80
28	8.6	10-32" / fittings $\varnothing$ 4.7	5	F960-05B85
			25	F960-25B85
			43	F960-43B85
			73	F960-73B85
15	8.6	10-32" / 10-32"	5	F970-05
			25	F970-25
			43	F970-43
			73	F970-73

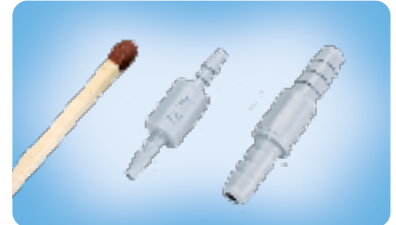

F950 with nipple



F960 with nipple and thread




F970 with thread


Accessories, enclosed

connecting nipple for F960 and F970

10-32" / fitting $\varnothing$ 2.7	F3120-80
$\varnothing$ 4.7	F3120-85
$\varnothing$ 5.6	F3120-86




F950...B80




F960...B80


fitting	for tube		
B80	$\varnothing$ 2.7	1/16"	$\varnothing$ 1.6 mm
B85	$\varnothing$ 4.7	1/8"	$\varnothing$ 3.2 mm
B86	$\varnothing$ 5.6	0.17"	$\varnothing$ 4.3 mm



F950...B85



F960...B85



F970

* Product group

PDF CAD
www.aircom.net




Order example:
F950-05B80

Check valve	The check valve permits flow in one direction only. A small check disc within the housing ensures free flow in one direction and at the same time seals off on the other side.		
Restrictor check valve	The restrictor check valve provides a constant flow in one direction, defined through the orifice size, and a flow of the full nominal size towards the other direction.		
Media	5 µm filtered compressed air or non-corrosive gases		
Diameter tolerance	-3% to +10% of nominal diameter		
Operating pressure	max. 0.7 bar at F2804-400/1/2/3,	max. 5.2 bar at F2804-404	
Cracking pressure	< 20 mbar at F2804-400/1/2/3,	< 25 mbar at F2804-404	
Temperature range	5 °C to 50 °C / 41 °F to 122 °F		
Material	Body: polysulphone at F2804-400/1/2/3, polypropylene at F2804-404		
	Check disc: Celcon® at F2804-401/2, silicone at F2804-400/3/4		



3.4/57
l/min



Ø 0.1 up to
1.0 mm

Dimensions	Operating pressure	Check disk	Connection	Leakage rate	Flow rate	Nominal size	Order number	
A	max. bar	made of		< ml/min*2	l/min*1	colour / DN		
mm								D*

Check valve

operating pressure max. 0.7 / 5.2 bar

F2804

12	0.7	silicone	plain fittings Ø 2.4	3	3.4	red	1.5	F2804-400
		Celcon®		51		orange	1.5	F2804-401
		Celcon®		17		green	1.5	F2804-402
		silicone		3		blue	1.5	F2804-403
26	0.7	Celcon®	fittings Ø 2.7	51	3.4	grey	1.5	F2804-401-B80
		Celcon®		17		grey	1.5	F2804-402-B80
		silicone		3		grey	1.5	F2804-403-B80
30	0.7	Celcon®	fittings Ø 4.7	51	3.4	grey	1.5	F2804-401-B85
		Celcon®		17		grey	1.5	F2804-402-B85
		silicone		3		grey	1.5	F2804-403-B85
15	5.2	silicone	10-32"	1	57	grey	3.8	F2804-404
		silicone	fittings Ø 2.7	1		grey	3.8	F2804-404-B80
		silicone	fittings Ø 4.7	1		grey	3.8	F2804-404-B85



F2804-400/1/2/3
check valve



F2804-404-B85/...-B80
check valve

Restrictor check valve

operating pressure max. 5.2 bar

F2804

15	5.2	silicone	10-32"					0.10 F2804-404-041
								0.13 F2804-404-050
								0.15 F2804-404-051
								0.18 F2804-404-071
								0.25 F2804-404-101
								0.30 F2804-404-121
								0.41 F2804-404-161
								0.51 F2804-404-201
								0.64 F2804-404-251
								0.76 F2804-404-301
								1.02 F2804-404-401




F2804-404-071/-301
restrictor check valve

Special options, add the appropriate number


increased cracking pressure	for check valve, with spring	35 mbar	F2804-404-05
-----------------------------	------------------------------	---------	--------------

Accessories, enclosed


connecting nipple	for F2804-404	10-32" / fitting Ø 2.7	F3120-80
		Ø 4.7	F3120-85
		Ø 5.6	F3120-86




F2804-40.-B80



F2804-40.- with plain fittings



F2804-40. B85



F2804-404

fitting	for tube		
B80	Ø 2.7	1/16"	Ø 1.6 mm
B85	Ø 4.7	1/8"	Ø 3.2 mm
B86	Ø 5.6	0.17"	Ø 4.3 mm

*1 at max. operating pressure *2 at Δp or P₁ = 70 mbar, at type F2804-404: P₁ = 5.2 bar

* Product group

PDF CAD
www.aircom.net



Order example:
F2804-400