

### Description

Pilot-operated volume booster with positive bias designed to supply outlet pressure equal to signal pressure plus an adjustable preset spring constant. With very high forward and reverse flow characteristics and excellent sensitivity. A typical application is balancing or regulating pressure in tanks. oil-free and 5 µm filtered compressed air or non-corrosive gases

### Media

Supply pressure

Pilot pressure

Accuracy

Air consumption

Relieving function


Relief capacity

Gauge port

Temperature range

Material

max. 16 bar  
 max. 10 bar, accordingly lower in the case of manual pre-pressure setting, pilot port G $\frac{1}{8}$  at supply pressure change from 2 bar to 7 bar:  
 < 6 mbar pressure deviation  
 at flow rate change from 0 l/min to 20 l/min:  
 < 20 mbar pressure deviation  
 response sensitivity:  
 1.5 l/min at P $_1$ = 5 bar, 2 l/min at P $_1$ = 7 bar, 4 l/min at P $_1$ = 10 bar, < 1% of volume flow relieving  
 700 l/min at 6 bar outlet and 0.35 bar overpressure above setpoint  
 G $\frac{1}{4}$  on both sides of the body, one screw plug supplied  
 0 °C to 60 °C / 32 °F to 140 °F, for appropriately conditioned compressed air down to -30 °C / -22 °F  
 Body: zinc die-cast  
 Elastomer: NBR/Buna-N

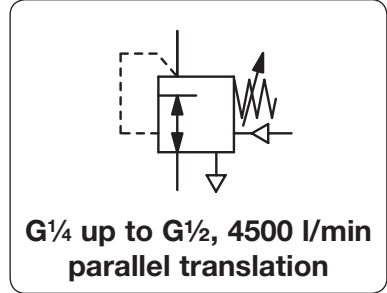

Dimensions			K <sub>v</sub> value (m <sup>3</sup> /h)	Flow rate (m <sup>3</sup> /h*1)	Connection thread	Positive bias (bar)	Pressure range (bar)	Order number
A (mm)	B (mm)	C (mm)						

Volume booster			supply pressure max. 16 bar, with constant bleed, tapped exhaust, transmission ratio 1:1					R03-J	
82	106	41	2.0	198	3300	G $\frac{1}{4}$ *3	without	0.05 ... 10	R03-02J
			2.3	228	3800	G $\frac{3}{8}$ *3			R03-03J
			2.7	270	4500	G $\frac{1}{2}$			R03-04J



R03-...J

Positive bias booster			supply pressure max. 16 bar, with constant bleed, tapped exhaust, transmission ratio 1:1					R03-J .	
82	142	41	2.0	198	3300	G $\frac{1}{4}$ *3	0 ... 1 bar	0.05 ... 10	R03-02J1
			2.3	228	3800	G $\frac{3}{8}$ *3			R03-03J1
			2.7	270	4500	G $\frac{1}{2}$			R03-04J1
82	180	41	2.0	198	3300	G $\frac{1}{4}$ *3	0 ... 6 bar	0.05 ... 10	R03-02J6
			2.3	228	3800	G $\frac{3}{8}$ *3			R03-03J6
			2.7	270	4500	G $\frac{1}{2}$			R03-04J6





R03-...J1






### Accessories, enclosed

- pressure gauge Ø 50 mm, 0...\*2 bar, G $\frac{1}{4}$
- mounting nut made of plastic
- mounting bracket made of steel

for RB-...J1  
**MA5002-..\*2**  
**M30x15K**  
**BW00-36**

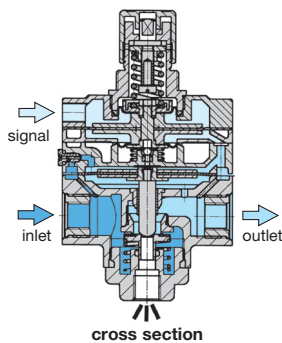

R03-...J6

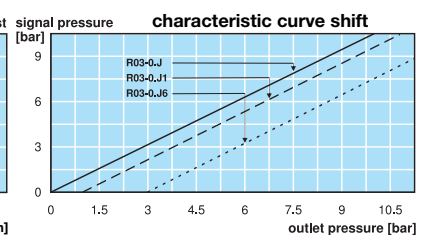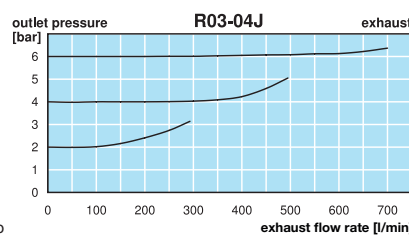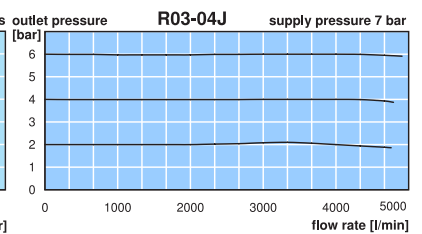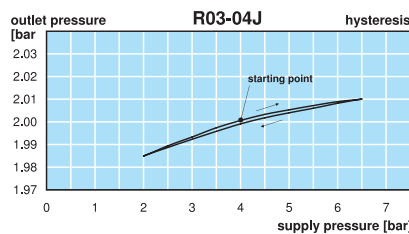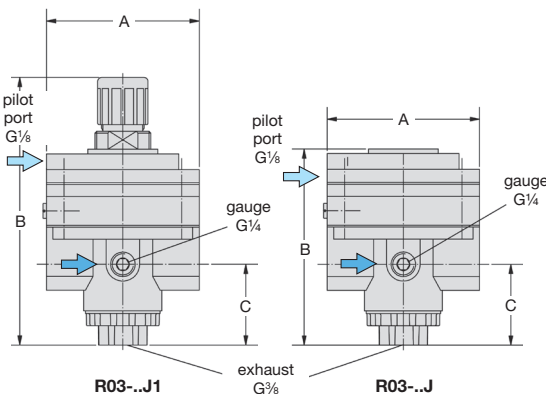

\*1 at 7 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop  
 \*2 02 = 0...2.5 bar, 04 = 0...4 bar, 06 = 0...6 bar, 10 = 0...10 bar, 16 = 0...16 bar  
 \*3 standard unit G $\frac{1}{2}$  reduced to smaller threads by fittings