


Description	Diaphragm pressure regulator in small design for "feedback systems" in conjunction with volume flow boosters. Due to the external feedback, regulation is significantly improved and the flow rate increased.		
Media	compressed air and non-corrosive gases		
Supply pressure	max. 16 bar	Air consumption	approx. 3 to 6 l/min
Adjustment	by handwheel with snap-lock, for panel mounting		
External Feedback	should be installed at the outlet of the booster, e.g. at the gauge port, or at the outlet pipe. This will measure the pressure drop at the output of the booster and the pilot pressure will be readjusted.		
Relieving function	relieving		
Gauge port	G $\frac{1}{4}$ on both sides of the body, screw plugs supplied	Feedback connection	G $\frac{1}{4}$
Temperature range	0 °C to 60 °C / 32 °F to 140 °F	Mounting position	any
Material	Body: zinc die-casting	Spring cage: zinc die-casting	Elastomer: FKM



**G $\frac{1}{4}$, max. 16 bar
420 l/min**

Dimensions			K _v -value (m ³ /h)	Flow rate		Connection thread	Pressure range bar	Order number
A	B	C		m ³ /h*1	l/min*1			
mm	mm	mm				G		

Regulator with external feedback

supply pressure max. 16 bar, relieving, with air consumption

R218

82	154	19	0,3	25	420	G $\frac{1}{4}$	0.2 ... 7.0	R218-02C
----	-----	----	-----	----	-----	-----------------	-------------	-----------------




R218



Accessories, enclosed

pressure gauge Ø 63 mm, 0 ... 10 bar, G $\frac{1}{4}$
mounting bracket made of steel
mounting nut made of brass


MA6302-10
BW00-36
M20x1,5M

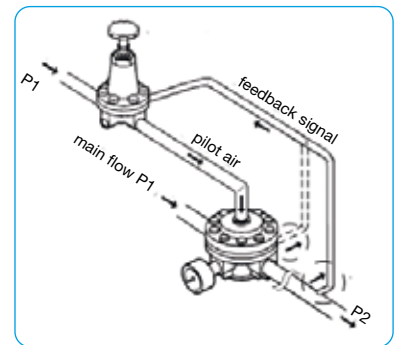


Example: combination with booster




panel cut-out

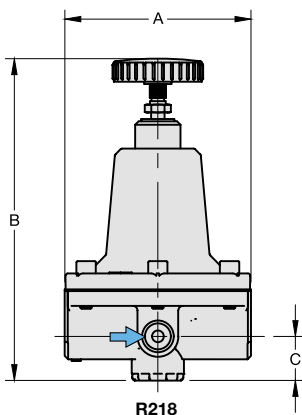


R218

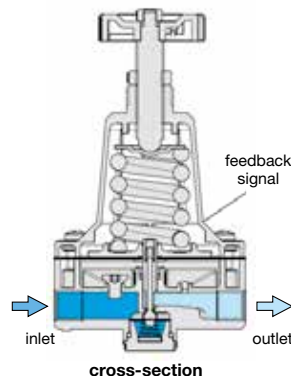

cross-section



BW00-36

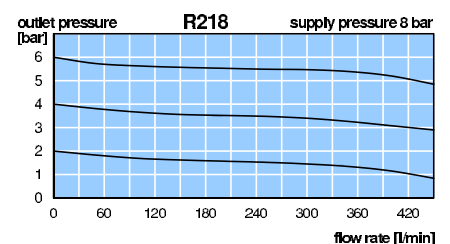

*1 at 8 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop

* Product group

