


<b>Description</b>	Standard mist lubricator in modular design with large volume flow. Can be blocked with filter or regulator without the use of a double nipple. Bypass valve and Venturi nozzle ensure low pressure loss and continuous compressed air lubrication.		
<b>Bowl</b>	metal bowl with sight glass		
<b>Operating pressure</b>	max. 17 bar		
<b>Oil refilling</b>	oil refilling under pressure possible		
<b>Temperatur range</b>	0 °C up to 80 °C		
<b>Material</b>	Body: alu die-cast	Sight glass: Polycarbonate	Elastomer: NBR
	Bowl: alu die-cast		



Dimensions			Bowl	Flow rate	Operating pressure	Connection	Order number
A	B	C	Design	Capacity	max. bar	thread	
mm	mm	mm	made of/with	l	m³/h*1	G	A*

"Maxi"-Lubricator				Supply pressure max. 17 bar	L520				
87	208	152	metal/sight glass	0.3	126	2100	17	G¼	L520-02W
87	208	152			204	3400		G¾	L520-03W
87	208	152			450	7500		G½	L520-04W
87	208	152			450	7500		G¾	L520-06W

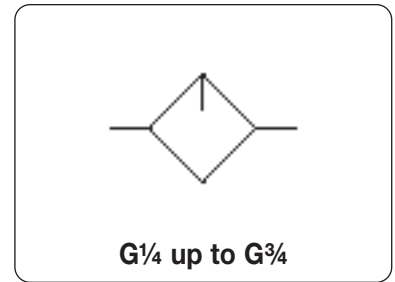


L520

## Special options, add the appropriate letter


**flange connection** according to EN-1092-1 or ASME B16.5 on request L520-0 . WF .

## Accessories, enclosed


**mounting bracket** made of stainless steel **BW00-520**

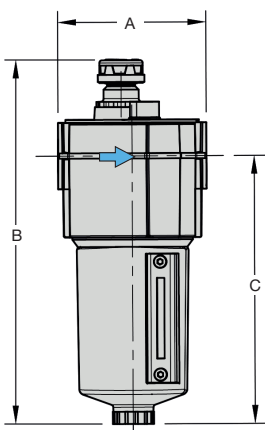

L520



BW00-520

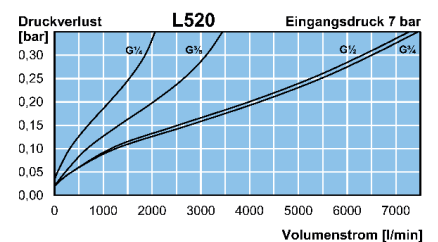

\*1 at 7 bar supply pressure and 0.33 bar pressure drop

Extensions: see chapter for FRL service units

PDF CAD  
www.aircom.net

\* Product group



Order example:  
L520-02W

