

Description Good value pressure regulator of solid design. RD1 and RD3 are equipped with diaphragms, RD4 is piston-operated. Wall mounting through two drilled holes in the bodies of RD1 to RD3.

Media compressed air or non-corrosive gases

Supply pressure max. 30 bar

Adjustment RD1/RD2: by plastic knob with snap-lock
RD3: by handwheel
RD4: by T-handle


Relieving function relieving, optionally non-relieving

Gauge port G $\frac{1}{4}$ on both sides of the body, G $\frac{1}{2}$ at RD1

Mounting position any

Temperature range -10 °C to 50 °C / 14 °F to 122 °F for RD1, RD2 and RD4
-20 °C to 60 °C / -4 °F to 140 °F for RD3

Material Body: zinc die-cast at RD1, aluminium at RD2, RD3 and RD4
Spring cage: plastic reinforced with glass fibre at RD1, nylon at RD2, aluminium at RD3/RD4
Elastomer: NBR/Buna-N Inner valve: brass


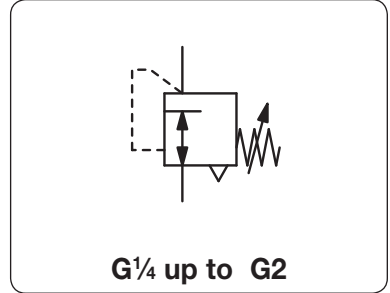


Dimensions			K _v -value	Flow rate		P ₁ max.	Connection thread	Pressure range	Order number
A	B	C		m ³ /h*	l/min*1				

Pressure regulator										supply pressure max. 20 / 30 bar, relieving, without pressure gauge		RD1...RD4	
40	95	22	0.3	27	450	20	G $\frac{1}{2}$	0.2...1.5	RD1-01A				
								0.3...3.0	RD1-01B				
								0.5...8.0	RD1-01D				
								1.5... 15	RD1-01E				
40	95	22	0.3	27	450	20	G $\frac{1}{4}$	0.2...1.5	RD1-02A				
								0.3...3.0	RD1-02B				
								0.5...8.0	RD1-02D				
								1.5... 15	RD1-02E				
64	151	48	1.5	108	1800	20	G $\frac{3}{8}$	0.2...1.5	RD2-03A				
								0.3...3.0	RD2-03B				
								0.5...8.0	RD2-03D				
								1.5... 15	RD2-03E				
64	151	48	1.5	108	1800	20	G $\frac{1}{2}$	0.2...1.5	RD2-04A				
								0.3...3.0	RD2-04B				
								0.5...8.0	RD2-04D				
								1.5... 15	RD2-04E				
130	187	54	3.0	195	3250	30	G $\frac{3}{4}$	0.2...1.5	RD3-06A				
								0.3...3.0	RD3-06B				
								0.5...8.0	RD3-06D				
								1.5... 15	RD3-06E				
130	187	54	3.0	195	3250	30	G1	0.2...1.5	RD3-08A				
								0.3...3.0	RD3-08B				
								0.5...8.0	RD3-08D				
								1.5... 15	RD3-08E				
241	187	54	3.0	195	3250	30	G1 $\frac{1}{4}$	0.2...1.5	RD3-10A				
								0.3...3.0	RD3-10B				
								0.5...8.0	RD3-10D				
								1.5... 15	RD3-10E				
241	187	54	3.0	195	3250	30	G1 $\frac{1}{2}$	0.2...1.5	RD3-1AA				
								0.3...3.0	RD3-1AB				
								0.5...8.0	RD3-1AD				
								1.5... 15	RD3-1AE				




series	D	Ø E	M
RD1	30	4.5	M30x1,5
RD2	51	5.5	M50x1,5
RD3	76	6.5	-
RD4	76	8.5	-

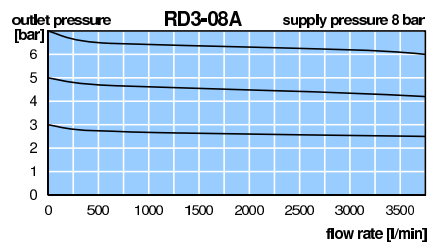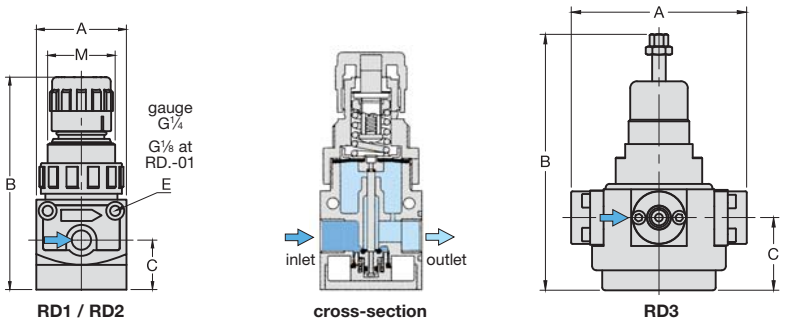

*1 at 8 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop
*2 02 = 0...2.5 bar, 04 = 0...4 bar, 10 = 0...10 bar, 16 = 0...16 bar

Description	Good value pressure regulator of solid design. RD1 and RD3 are equipped with diaphragms, RD4 is piston-operated. Wall mounting through two drilled holes in the bodies of RD1 to RD3.
Media	compressed air or non-corrosive gases
Supply pressure	max. 30 bar
Adjustment	RD1/RD2: by plastic knob with snap-lock RD3: by handwheel RD4: by T-handle
Relieving function	relieving, optionally non-relieving
Gauge port	G $\frac{1}{4}$ on both sides of the body, G $\frac{1}{8}$ at RD1
Mounting position	any
Temperature range	-10 °C to 50 °C / 14 °F to 122 °F for RD1, RD2 and RD4 -20 °C to 60 °C / -4 °F to 140 °F for RD3
Material	Body: zinc die-cast at RD1, aluminium at RD2, RD3 and RD4 Spring cage: plastic reinforced with glass fibre at RD1, nylon at RD2, aluminium at RD3/RD4 Elastomer: NBR/Buna-N Inner valve: brass

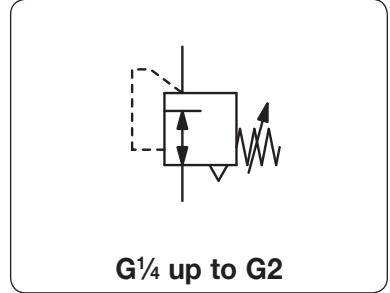

Dimensions			K _v -value	Flow rate	P ₁ max.	Connection thread	Pressure range	Order number
A	B	C						

Pressure regulator								supply pressure max. 20 / 30 bar, relieving, without pressure gauge	RD1...RD4
215	385	130	18.6	1320	22 000	30	G $\frac{1}{2}$	0.2...1.5	RD4-12A
								0.3...3.0	RD4-12B
								0.5...8.0	RD4-12D
								1.5... 15	RD4-12E
215	385	130	18.6	1320	22 000	30	G2	0.2...1.5	RD4-16A
								0.3...3.0	RD4-16B
								0.5...8.0	RD4-16D
								1.5... 15	RD4-16E






Special options, add the appropriate letter



non-relieving without relieving function RD K
30 bar operating pressure RD H

Accessories

pressure gauge	Ø 40 mm, 0... ^{*2} bar, G $\frac{1}{8}$	for RD1	MA4001-..^{*2}
	Ø 50 mm, 0... ^{*2} bar, G $\frac{1}{4}$	for RD2	MA5002-..^{*2}
	Ø 63 mm, 0... ^{*2} bar, G $\frac{1}{4}$	for RD3 and RD4	MA6302-..^{*2}
mounting bracket	made of steel	for RD1	BW30-02
mounting nut	made of plastic	for RD1	M30x1,5K
mounting bracket	made of steel	for RD2	BW50-03
mounting nut	made of plastic	for RD2	M50x1,5K
mounting bracket	made of steel	for RD3	BW00-06



series	D	Ø E	M
RD1	30	4.5	M30x1,5
RD2	51	5.5	M50x1,5
RD3	76	6.5	-
RD4	76	8.5	-

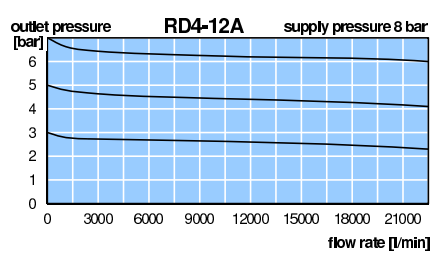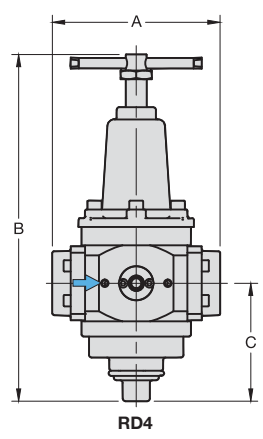

*1 at 8 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop
*2 02 = 0...2.5 bar, 04 = 0...4 bar, 10 = 0...10 bar, 16 = 0...16 bar